




PIN VIEW		
P1 (1-3/8 FEMALE) 	1. BK	
	2. GN	
	(GN/YE)	
	3. WH	

SPECIFICATIONS	
HOUSING MATERIAL/COLOR	TPU/BLACK
CONTACT BODY MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	Cu/Au
SEAL MATERIAL	-
NUT MATERIAL/COLOR	Cu/Ni
CABLE SHEATH MATERIAL/COLOR	PVC/BLACK
CABLE CROSS-SECTION(AWG)/SHIELD	3Cx4mm ²
BENDING CYCLES/TORSION	-
RATED CURRENT (A)	18A/25A/30A
RATED VOLTAGE (V)	600V
TEMPERATURE RANGE FROM/TO	-40℃~+80℃
DEGREE OF PROTECTINN	IP67(when properly tightened)

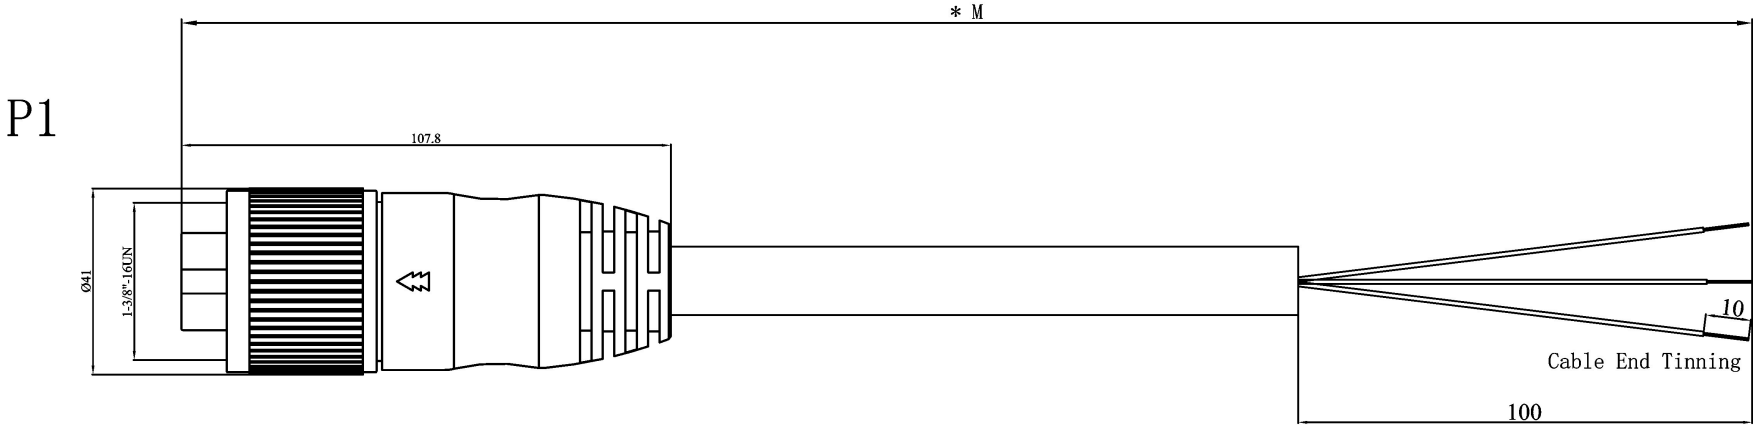

IPC620-D		
CABLE LENGTH (Unit: M)	UPPER (mm)	LOWER (mm)
*≤0.3	25	0
0.3<*≤1.5	50	0
1.5<*≤3	100	0
3<*≤7.5	150	0
>7.5	+5%-0%	0

/		/	/	/
REV	MARK	DATE	DESC. OF CHG	CHG. BY

Tianjin Geneuo Technology Co., Ltd. 									
		THIRD ANGLE PROJECTION		MODEL NO. PK3-*M/P00					
				ITEM NO.		VER	A		
DWG.	Heng, Yue	CHK.	Jie, Ma	APPR.	Deyou, Yang	DATE	2025/07/21	DATE	2025/08/22