


PIN VIEW

P1 (M12 FEMALE)




1. WH/BU	
2. WH/BN	
3. BN	
4. OR	
5. WH/GN	
6. WH/OR	
7. BU	
8. GN	

SHELL SHIELDED

SPECIFICATIONS

HOUSING MATERIAL/COLOR	TPU/BLACK
CONTACT BODY MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	Cu/Au
SEAL MATERIAL	FPM/FKM
NUT MATERIAL/COLOR	Cu/Ni
CABLE SHEATH MATERIAL/COLOR	PUR/BLUE
CABLE CROSS-SECTION (AWG) /SHIELD	4x2x26AWG/SHIELD/CAT. 5e
BENDING CYCLES/TORSTION	-
RATED CURRENT (A)	-
RATED VOLTAGE (V)	-
TEMPERATURE RANGE FROM/TO	-40°C~+80°C
DEGREE OF PROTECTINN	IP67(when properly tightened)

P1

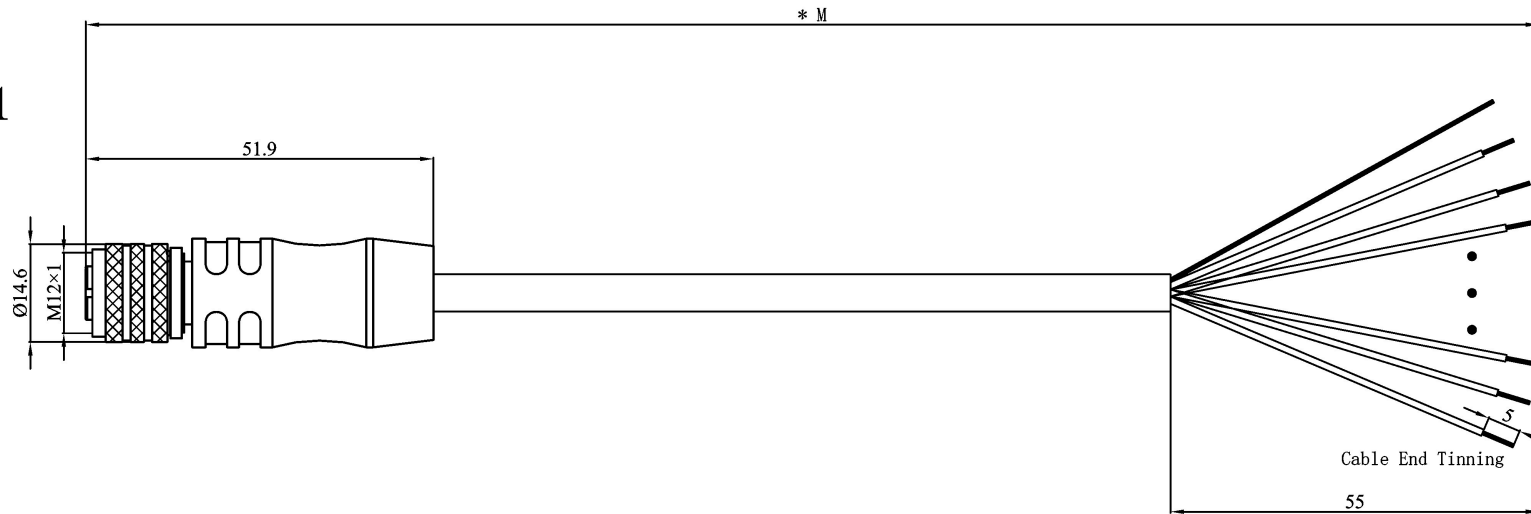

IPC620-D		
CABLE LENGTH (Unit: M)	UPPER (mm)	LOWER (mm)
*≤0.3	25	0
0.3<*≤1.5	50	0
1.5<*≤3	100	0
3<*≤7.5	150	0
>7.5	+5%-0%	0

Tianjin Geneuo Technology Co., Ltd.

THIRD ANGLE PROJECTION		MODEL NO.			
		EIK8-*M/E41			
ITEM NO.		VER	A		
DWG.	Sibo.Zhao	CHK.	Jie.Ma	APPR.	Deyou.Yang
DATE	2025/07/23	DATE	2025/08/18	DATE	2025/06/10
UNITS	SCALE				
mm	1:1				

REV	MARK	DATE	DESC. OF CHG	CHG. BY
/	/	/	/	/