



PIN VIEW		
P1 (M16 FEMALE) 	1. WH	
	2. GN	
	3. BK	

SPECIFICATIONS	
HOUSING MATERIAL/COLOR	TPU/BLACK
CONTACT BODY MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	Cu/Au
SEAL MATERIAL	FPM/FKM
NUT MATERIAL/COLOR	Cu/Ni
CABLE SHEATH MATERIAL/COLOR	PVC/BLACK
CABLE CROSS-SECTION (AWG) /SHIELD	3x14AWG/-
BENDING CYCLES/TORSION	-
RATED CURRENT (A)	15A
RATED VOLTAGE (V)	600V
TEMPERATURE RANGE FROM/TO	-40℃~+80℃
DEGREE OF PROTECTINN	IP67(when properly tightened)

P1

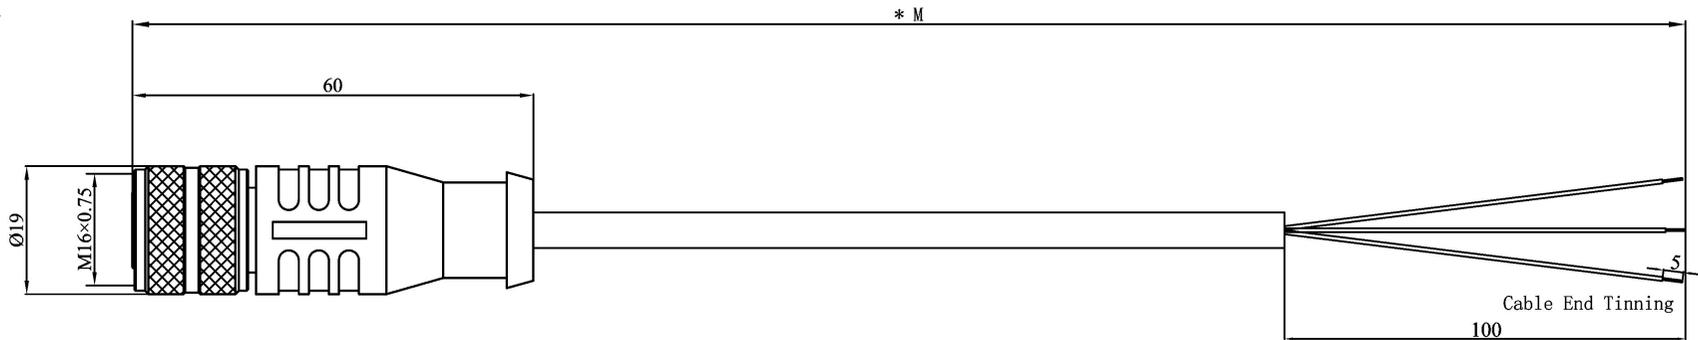

IPC620-D		
CABLE LENGTH (Unit: M)	UPPER (mm)	LOWER (mm)
*≤0.3	25	0
0.3<*≤1.5	50	0
1.5<*≤3	100	0
3<*≤7.5	150	0
>7.5	+5%-0%	0

REV	MARK	DATE	DESC. OF CHG	CHG. BY
/		/	/	/

Tianjin Geneuo Technology Co., Ltd. 

THIRD ANGLE PROJECTION		MODEL NO.	
		DNK3-3-*M/P00	
UNITS	SCALE	ITEM NO.	VER
mm	1:1		A
DWG.	CHK.	APPR.	
Lishun.Li	Jie.Ma	Deyou.Yang	
DATE 2025/07/18	DATE 2025/08/07	DATE 2025/06/10	