



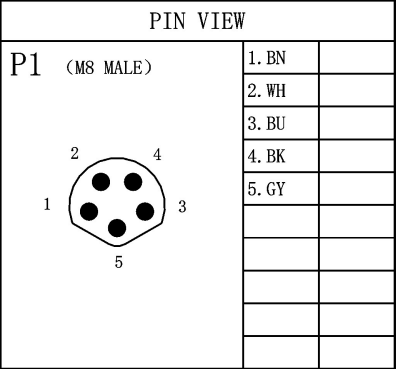


SPECIFICATIONS	
HOUSING MATERIAL/COLOR	TPU/BLACK
CONTACT BODY MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	Cu/Au
SEAL MATERIAL	-
NUT MATERIAL/COLOR	Cu/Ni
CABLE SHEATH MATERIAL/COLOR	PVC/BLACK
CABLE CROSS-SECTION (AWG) /SHIELD	5x22AWG/SHIELD
BENDING CYCLES/TORSION	-
RATED CURRENT (A)	3A
RATED VOLTAGE (V)	30V
TEMPERATURE RANGE FROM/TO	-40℃~+80℃
DEGREE OF PROTECTINN	IP67(when properly tightened)

P1

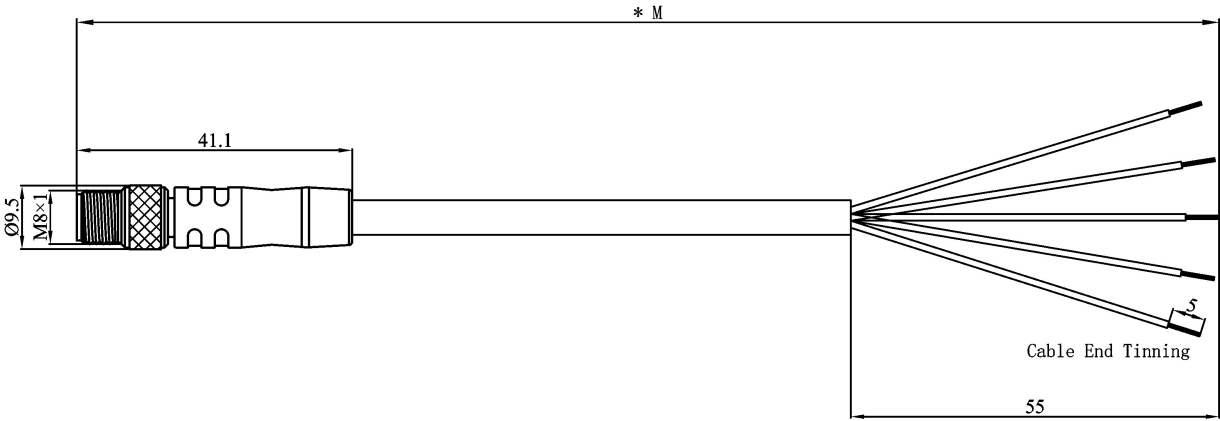

IPC620-D		
CABLE LENGTH (Unit: M)	UPPER (mm)	LOWER (mm)
*≤0.3	25	0
0.3<*≤1.5	50	0
1.5<*≤3	100	0
3<*≤7.5	150	0
>7.5	+5%-0%	0

/	/	/	/
REV	MARK	DATE	DESC. OF CHG
			CHG. BY

Tianjin Geneuo Technology Co., Ltd.												
THIRD ANGLE PROJECTION 					MODEL NO.							
					SBZ5-*M/P00							
ITEM NO.					VER		A					
UNITS		SCALE			DWG.	Lishun.Li	CHK.	Jie.Ma	APPR.	Deyou.Yang		
mm		1:1			DATE	2025/07/17	DATE	2025/08/06	DATE	2025/06/10		