


PIN VIEW


P1 (M16 MALE)



1. WH	
2. GN	
3. BK	
4. RD	

SPECIFICATIONS

HOUSING MATERIAL/COLOR	TPU/BLACK
CONTACT BODY MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	Cu/Au
SEAL MATERIAL	-
NUT MATERIAL/COLOR	Cu/Ni
CABLE SHEATH MATERIAL/COLOR	PVC/BLACK
CABLE CROSS-SECTION (AWG) /SHIELD	4x14AWG/-
BENDING CYCLES/TORSION	-
RATED CURRENT (A)	15A
RATED VOLTAGE (V)	600V
TEMPERATURE RANGE FROM/TO	-40℃~+80℃
DEGREE OF PROTECTINN	IP67(when properly tightened)

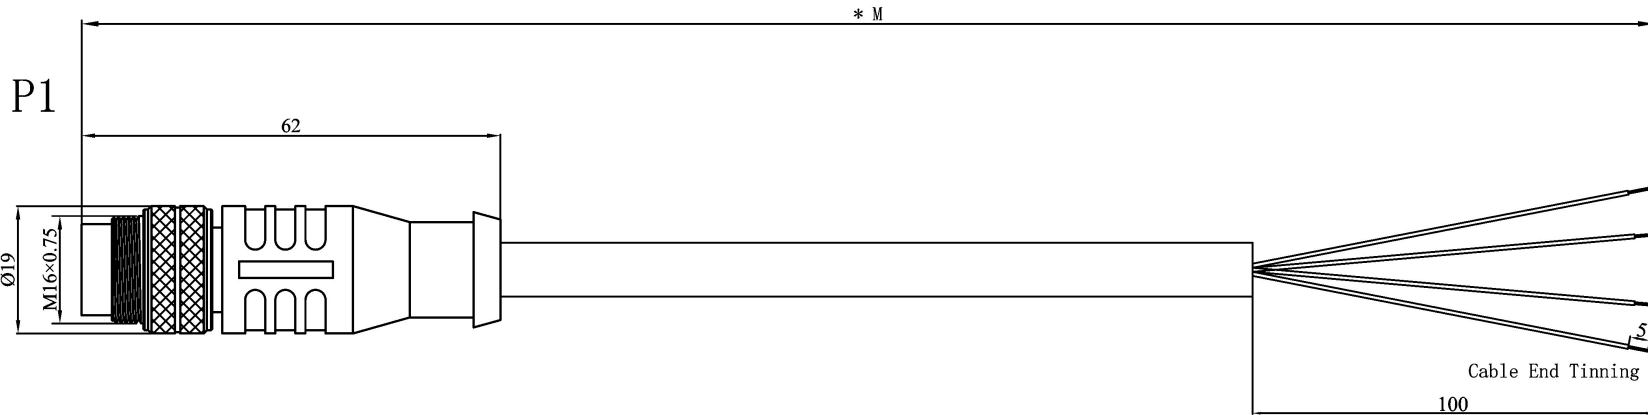

IPC620-D		
CABLE LENGTH (Unit: M)	UPPER (mm)	LOWER (mm)
*≤0.3	25	0
0.3<*≤1.5	50	0
1.5<*≤3	100	0
3<*≤7.5	150	0
>7.5	+5%-0%	0

REV	MARK	DATE	DESC. OF CHG	CHG. BY
/		/	/	/

Tianjin Geneuo Technology Co., Ltd.

THIRD ANGLE PROJECTION		MODEL NO.	
		DWZ4-4-*M/POO	
ITEM NO.			VER
			A
DWG.	Lishun.Li	CHK.	Jie.Ma
DATE	2025/07/21	DATE	2025/08/07
UNITS		SCALE	
mm		1:1	
APPR.	Deyou.Yang	DATE	2025/06/10