FEMALE END VIEW	MALE END VIEW
	
1=BN 2=N/C 3=BU 4=BK	1=BN 2=N/C 3=BU 4=BK

SPECIFICATIONS	
CONTANCT CARRIER MATERIAL/COLOR	PA/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	NBR
OPERATING CURRENT	1 A
OPERATING VOLTAGE	60 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	3 x 26 AWG
OPERATING TEMPERATURE	-25°C — +80°C
PROTECTION CLASS	IEC IP67

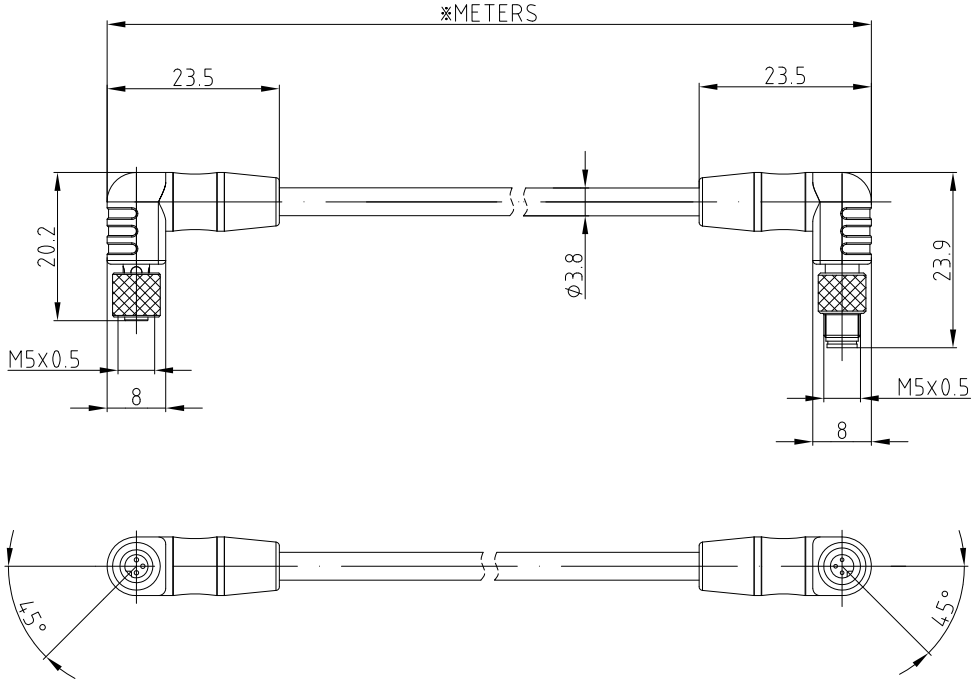

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT
MILLIMETER

GSEE TECH
Tianjin Geneuo Technology Co.,Ltd

Approved:
Date:

Date: 2018.4.16

Description:
BLK3 BLZ3-※M/P00

Process:YJ F
Date:2018.5.24

Scale: 1:1

Checked:WY
Date:2018.5.3

Designed:LXH
Date:2018.4.27

3RD Angle Projection

www.gsee-tech.cn
www.gsee-tech.com

SOURCE DRAWING-FOR REFERENCE ONLY

REV
A