




FEMALE END VIEW	MALE END VIEW
 Diagram of the female end view of a pin. It shows a circular cross-section with a vertical centerline. The left half is shaded. Four features are labeled: 1 (top left corner), 2 (top left corner), 3 (top left corner), and 4 (top left corner). 1=BN 2=N/C 3=BU 4=BK	 Diagram of the male end view of a pin. It shows a circular cross-section with a vertical centerline. The right half is shaded. Four features are labeled: 1 (top right corner), 2 (top right corner), 3 (top right corner), and 4 (top right corner). 1=BN 2=N/C 3=BU 4=BK

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PA/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	NBR
OPERATING CURRENT	1 A
OPERATING VOLTAGE	60 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	3 x 26 AWG
OPERATING TEMPERATURE	-25°C — +80°C
PROTECTION CLASS	IEC IP67

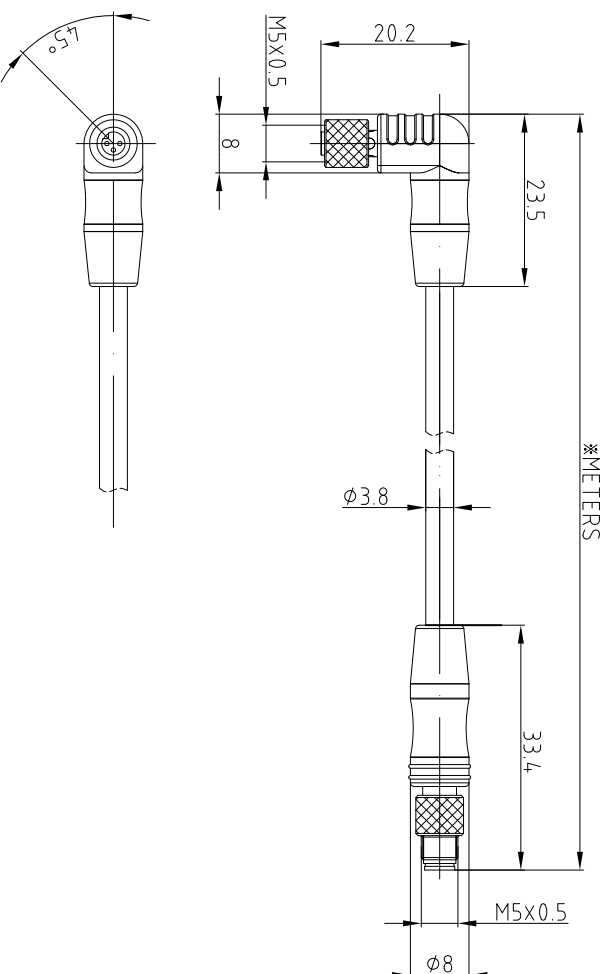

CABLE LENGTH		TOLERANCE		UNIT OF MEASUREMENT		Tianjin Geneuo Technology Co.,Ltd			
ALL LENGTHS		+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER		MILLIMETER					
STRIP LENGTH		TOLERANCE				Approved: Date:		Description:	
0 - 7mm		± 1.0mm				Date: 2018.4.16		BLK3 BZ3-3M/P00	
8 - 29mm		± 1.5mm				Process Y J F Date:2018.5.24			
30 - 49mm		± 2.0mm				Checked W Y Date:2018.5.3			
50 - 69mm		± 3.0mm				Designed L X H Date:2018.4.27			
70 - 100mm		± 4.0mm							
over 100mm		± 5.0mm							
REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	
								REV A	
SOURCE DRAWING-FOR REFERENCE ONLY									