



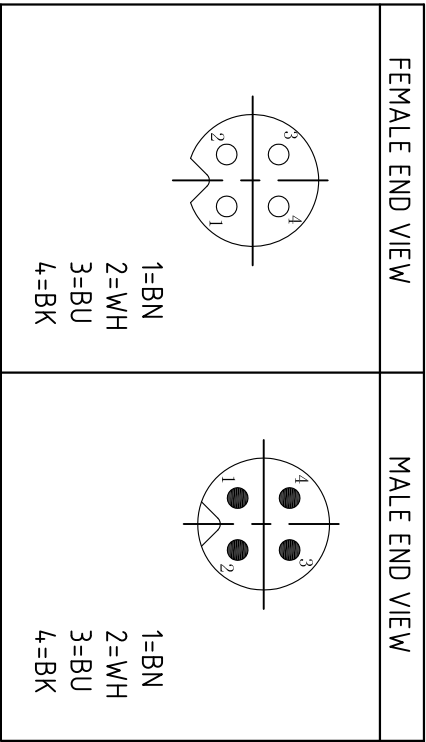

SPECIFICATIONS		
CONTACT CARRIER MATERIAL/COLOR	PA/BLACK	
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	
CONTACT/PLATING	BRASS/GOLD	
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	
O-RING MATERIAL	NBR	
OPERATING CURRENT	1 A	
OPERATING VOLTAGE	60 V	
CONDUCTOR INSULATION MATERIAL	PVC	
NUMBER OF CONDUCTORS (AWG)	4 x 26 AWG	
OPERATING TEMPERATURE	-25°C — +80°C	
PROTECTION CLASS	IEC IP67	

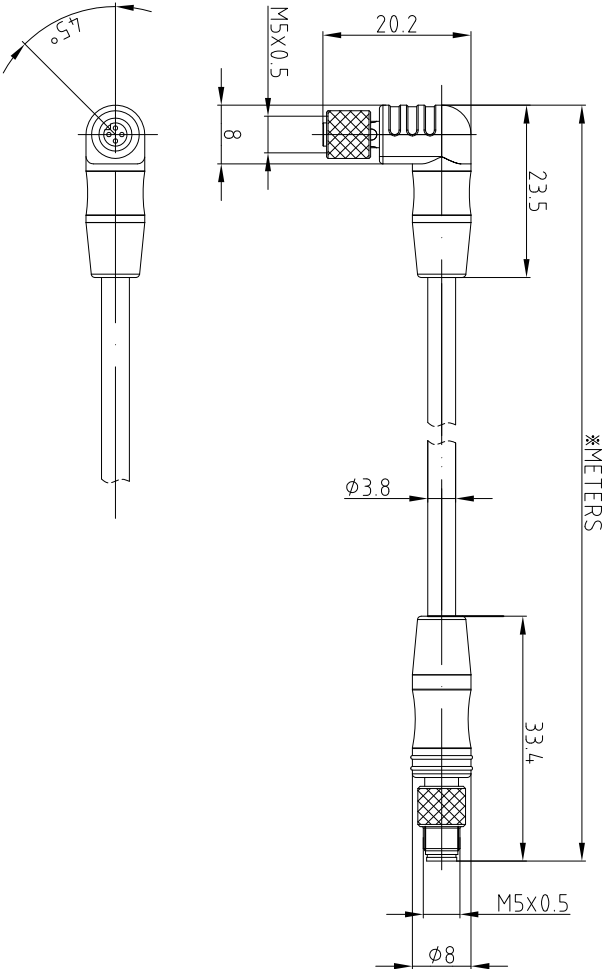

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

UNIT OF MEASUREMENT		Tianjin Geneuo Technology Co.,Ltd			GSEETECH	
MILLIMETER		Description :			www.gsee-tech.cn	REV
Approved:	Date:	2018.4.16			www.gsee-tech.com	A
Process YJF	Date:2018.5.24	Scale:	1:1		BLK4, BZ4-※M/P00	
Checked NY	Date:2018.5.3	3RD Angle Projection			SOURCE DRAWING-FOR REFERENCE ONLY	
Designed LXH	Date:2018.4.27					
REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE	