




MALE END VIEW



1=BN
2=WH
3=BU
4=BK

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PA/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
OPERATING CURRENT	1 A
OPERATING VOLTAGE	60 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	4 x 26 AWG
OPERATING TEMPERATURE	-25°C — +80°C
PROTECTION CLASS	IEC IP67

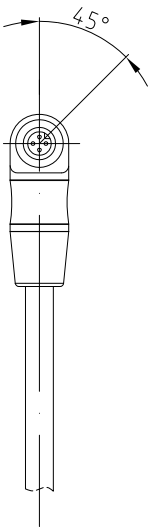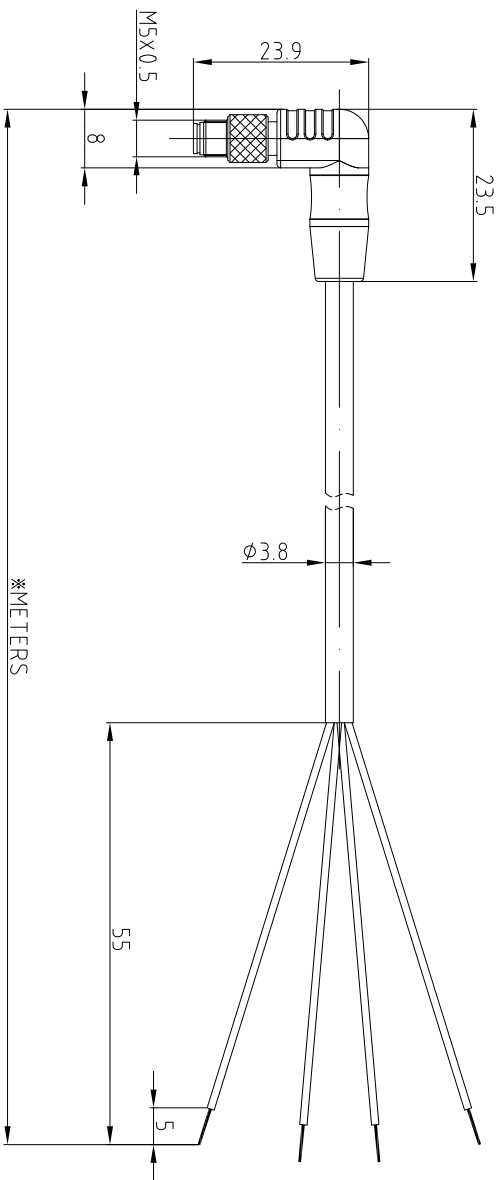

CABLE LENGTH	TOLERANCE
ALL LENGTHS	±4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

						UNIT OF MEASUREMENT		Tianjin Geneuo Technology Co.,Ltd					
						MILLIMETER		Date: 2018.4.16 Scale: 1:1 					
						Approved: Date:						Description: BLZ4-M/P00	
						Process:YJF Date:2018.5.24							
						Checked:WY Date:2018.5.3							
						Designed:XH Date:2018.4.27							
REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE			www.gsee-tech.cn www.gsee-tech.com		REV A			

www.gsee-tech.cn
www.gsee-tech.com

REV
A

SOURCE DRAWING-FOR REFERENCE ONLY