

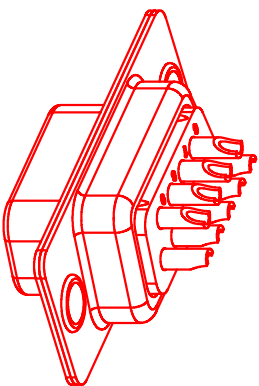



P0(XX)	A ±0.25	B ±0.13	C ±0.38	D ±0.25
009	16.33	24.99	30.81	19.28
015	24.66	33.32	39.14	27.51
025	38.38	47.04	53.04	41.28
037	54.84	63.50	69.32	57.71

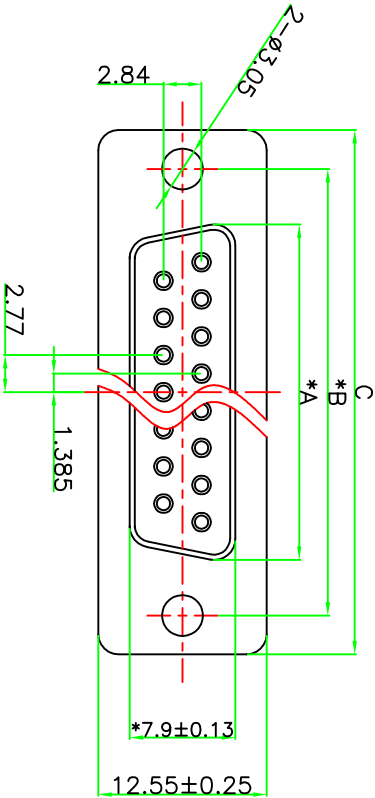

NOTICE :

- ELECTRICE:
DIELECTRIC RATING: 300V
CONTACT CURRENT RATING: 3AMP
CONTACT RESISTANCE: 15mΩ MAX.
INSULATION RESISTANCE: 1000MΩ MIN.at 500V DC
DIELECTRIC STRENGTH: 500V AC RMS for 1minute
OPERATION TEMPERATURE: -55℃ ~125℃
- MATERIAL:
INSULATOR: PBT+30% G. F (UL94V-0)
CONTACT: COPPER ALLOY
CONTACT PLATED:GOLD FLASH OVER NICKEL
SHELL: SPCC
SHELL PLATED: NICKEL/TIN

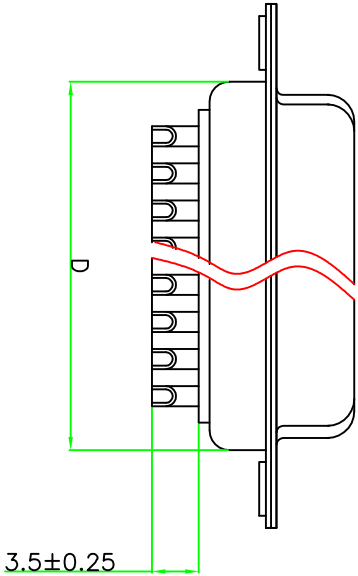

天津吉诺科技有限公司

TOLERANCE:		DRAWN BY :		PART NAME:	
XX ±0.38	王征	DATE : 2019. 12. 25		D8 9P 母 焊线式传统聊合 铁壳前锡后锡48H	
XXX ±0.25	CHECKED BY :	DATE :		端子冠簧式, 黑胶	
XXX ±0.13	X.X ±0.2°	DRAW NO. 51701161		PART NO. PDRXXXXH00XXXXXXX00	
X. ±5°	UNIT: mm [inch]	APPROVED BY: DATE : 2009. 08. 22		REMARK	
SCALE:1:1	SIZE: A4	MOLD NO.			