



MALE END VIEW



- 1. BU (CAN-)
- 2. WH (CAN+)
- 3. N/C
- 4. N/C
- 5. RD (24+)
- 6. BK (GND)

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PA6/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACTS	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT	7 A
RATED VOLTAGE	300V
CONDUCTOR INSULATION MATERIAL	PVC/BLACK
NUMBER OF CONDUCTORS (AWG)	4X18AWG
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

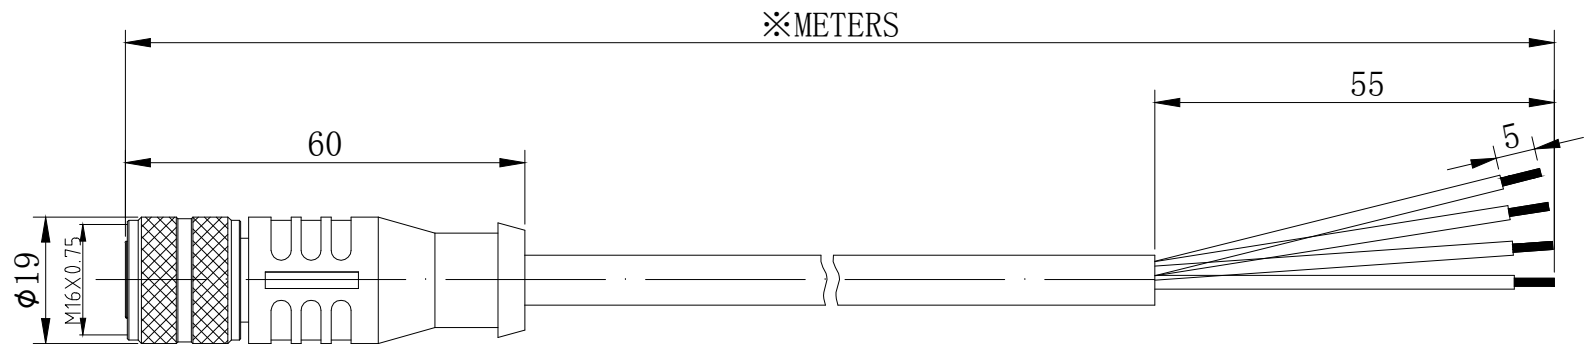

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER	 Tianjin Geneuo Technology Co.,Ltd		
Approved: Date:	Date: 2019.3.18	Description: DNK6-4-xM/P00	
Process: Date:	Scale: 1:1		
Checked: Date:	3RD Angle Projection 	www.gsee-tech.cn www.gsee-tech.com	REV A
Designed: ZL Date: 2019.4.9		SOURCE DRAWING-FOR REFERENCE ONLY	