


MALE END VIEW


A. BN
C. N/C
E. BK
G. PK
J. GN
L. BU
M. 与A短接
N. N/C
O. VT
P. WH
R. RD
S. GY
T. YE
U. 与L短接



A. BN
C. N/C
E. BK
G. PK
J. GN
L. BU
M. 与A短接
N. N/C
O. VT
P. WH
R. RD
S. GY
T. YE
U. 与L短接

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PA6/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACTS	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT	7A(18AWG), 3A(24AWG)
RATED VOLTAGE	125V(18AWG), 30V(24AWG)
CONDUCTOR INSULATION MATERIAL/COLOR	PVC/BLACK
NUMBER OF CONDUCTORS (AWG)	2x20AWG-8x24AWG
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

CONTACTANT CARRIER MATERIAL/COLOR	PA6/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACTS	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT	7A(18AWG),3A(24AWG)
RATED VOLTAGE	125V(18AWG),30V(24AWG)
CONDUCTOR INSULATION MATERIAL/COLOR	PVC/BLACK
NUMBER OF CONDUCTORS (AWG)	2x20AWG+8x24AWG
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

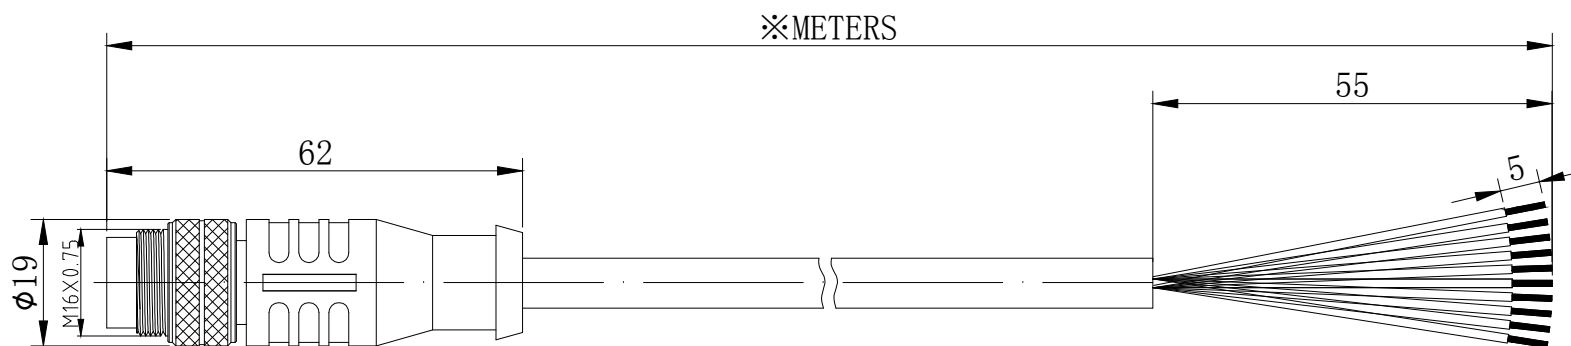

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0%(OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER			
Tianjin Geneuo Technology Co.,Ltd			
Approved: Date:	Date: 2019.3.18	Description: DWZ14-10-xM/P00	
Process: Date:	Scale: 1:1		
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com
Designed: ZL Date: 2019.4.9			
			REV A