MALE END VIEW



A. BN
C. RD/BU
E. BK
G. PK
J. GN
L. BU
M. OR
N. GY/BN
O. VT
P. WH
R. RD
S. GY
T. YE
U. TN

SPECIFICATIONS	
CONTANCT CARRIER MATERIAL/COLOR	PA6/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACTS	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT	3A
RATED VOLTAGE	30 V
CONDUCTOR INSULATION MATERIAL/COLOR	PVC/BLACK
NUMBER OF CONDUCTORS (AWG)	14X24AWG
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

※METERS

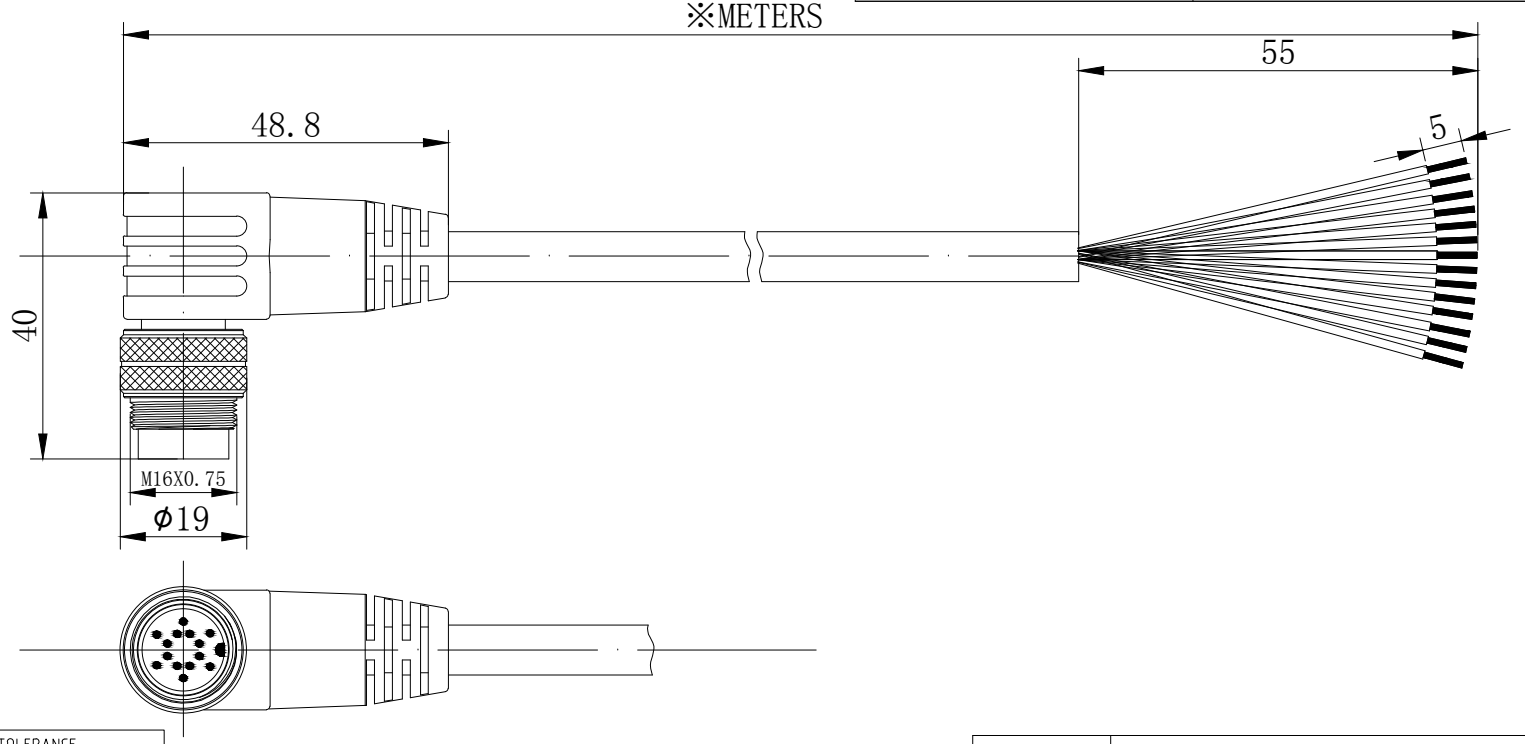

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT
MILLIMETER

Tianjin Geneuo Technology Co.,Ltd

Approved:
Date:

Process:
Date:

Checked:
Date:

Designed: ZL
Date: 2019.4.9

Date: 2019.3.18

Scale: 1:1

3RD Angle Projection

Description:
DWLZ14-14-xM/P00

www.gsee-tech.cn
www.gsee-tech.com

SOURCE DRAWING-FOR REFERENCE ONLY

REV
A