


MALE END VIEW


1. WH
2. BN
3. GN
4. YE
5. GY
6. PK
7. BU
8. RD



1. WH
2. BN
3. GN
4. YE
5. GY
6. PK
7. BU
8. RD


SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PA6/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACTS	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT	7 A
RATED VOLTAGE	125 V
CONDUCTOR INSULATION MATERIAL	PVC/BLACK
NUMBER OF CONDUCTORS (AWG)	8X18AWG
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

CONTACTANT CARRIER MATERIAL/COLOR	PA6/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACTS	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT	7 A
RATED VOLTAGE	125 V
CONDUCTOR INSULATION MATERIAL	PVC/BLACK
NUMBER OF CONDUCTORS (AWG)	8X18AWG
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

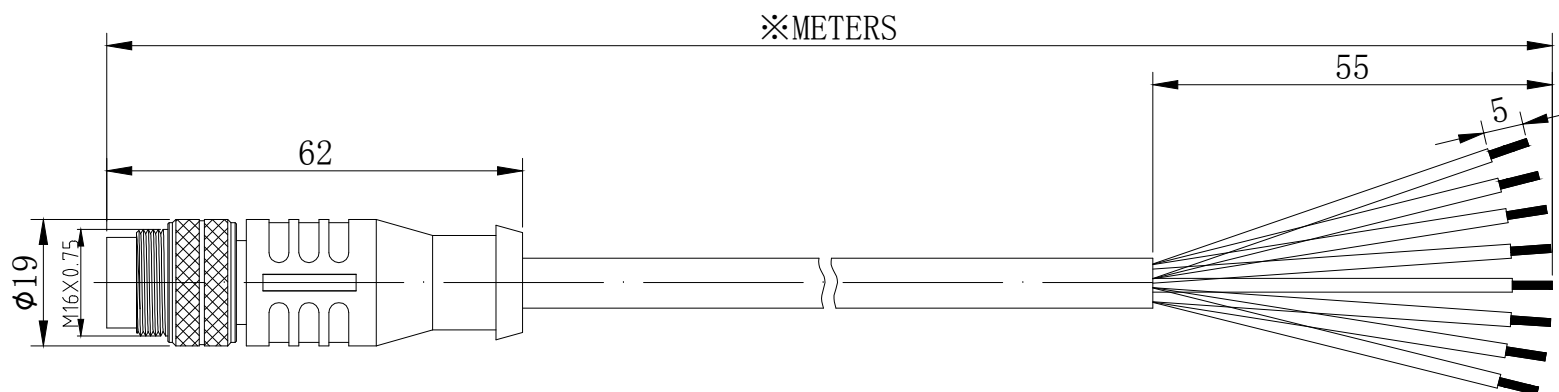

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4% (OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT			
MILLIMETER			
Tianjin Geneuo Technology Co.,Ltd			
Approved: Date:	Date: 2019.3.18	Description: DWZ8-8-xM/P00	
Process: Date:	Scale: 1:1		
Checked: Date:	3RD Angle Projection 	www.gsee-tech.cn www.gsee-tech.com	
Designed: ZL Date: 2019.4.9			