



FEMALE END VIEW

1=BN
2=BU
3=WH
4=GN 11=GY/PK
5=PK 12=RD/BU
6=YE 13=WH/GN
7=BK 14=BN/GN
8=GY 15=WH/YE
9=RD 16=YE/BN
10=VT 17=WH/GY




1=BN
2=BU
3=WH
4=GN 11=GY/PK
5=PK 12=RD/BU
6=YE 13=WH/GN
7=BK 14=BN/GN
8=GY 15=WH/YE
9=RD 16=YE/BN
10=VT 17=WH/GY

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FPM/FKM
OPERATING CURRENT	1.5 A
OPERATING VOLTAGE	30 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	17 x 26 AWG
OPERATING TEMPERATURE	-25°C — +80°C
PROTECTION CLASS	IEC IP67

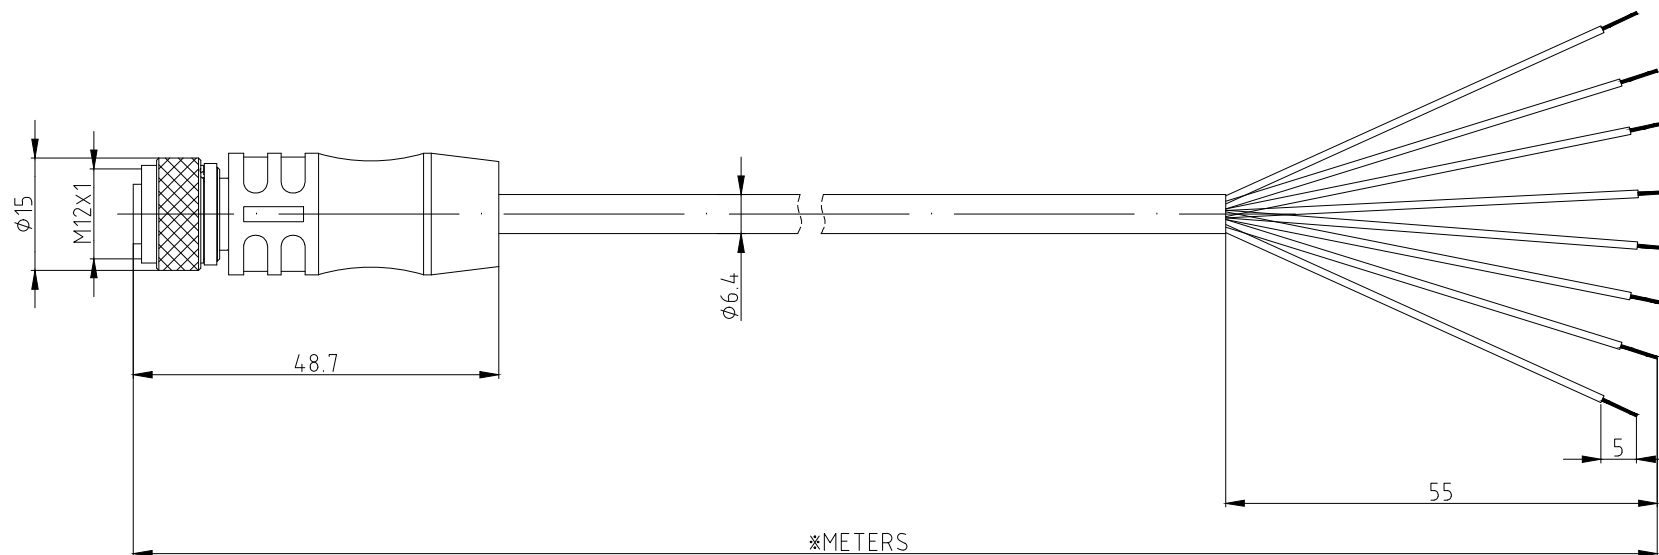

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0%(OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT				
MILLIMETER	Tianjin Geneuo Technology Co.,Ltd			
Approved: Date:	Date: 2018.4.16	Description: EK17-※M/P00		
Process:YJ F Date:2018.5.24	Scale: 1:1			
Checked:WY Date:2018.5.3	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	REV A
Designed:LXH Date:2018.4.27			SOURCE DRAWING-FOR REFERENCE ONLY	