



FEMALE END VIEW

1=BN
2=WH
3=BU
4=BK

The diagram shows a circular cross-section with a vertical centerline and a horizontal centerline. Four points are marked with small circles and numbers: 1 at the bottom, 2 on the left, 3 at the top, and 4 on the right. A curved arrow on the left side indicates a counter-clockwise rotation.



SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FPM/FKM
OPERATING CURRENT	4 A
OPERATING VOLTAGE	250 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)/SHIELD	4 x 22 AWG/POLYESTER FOIL SHIELD
OPERATING TEMPERATURE	-20°C — +80°C
PROTECTION CLASS	IEC IP67

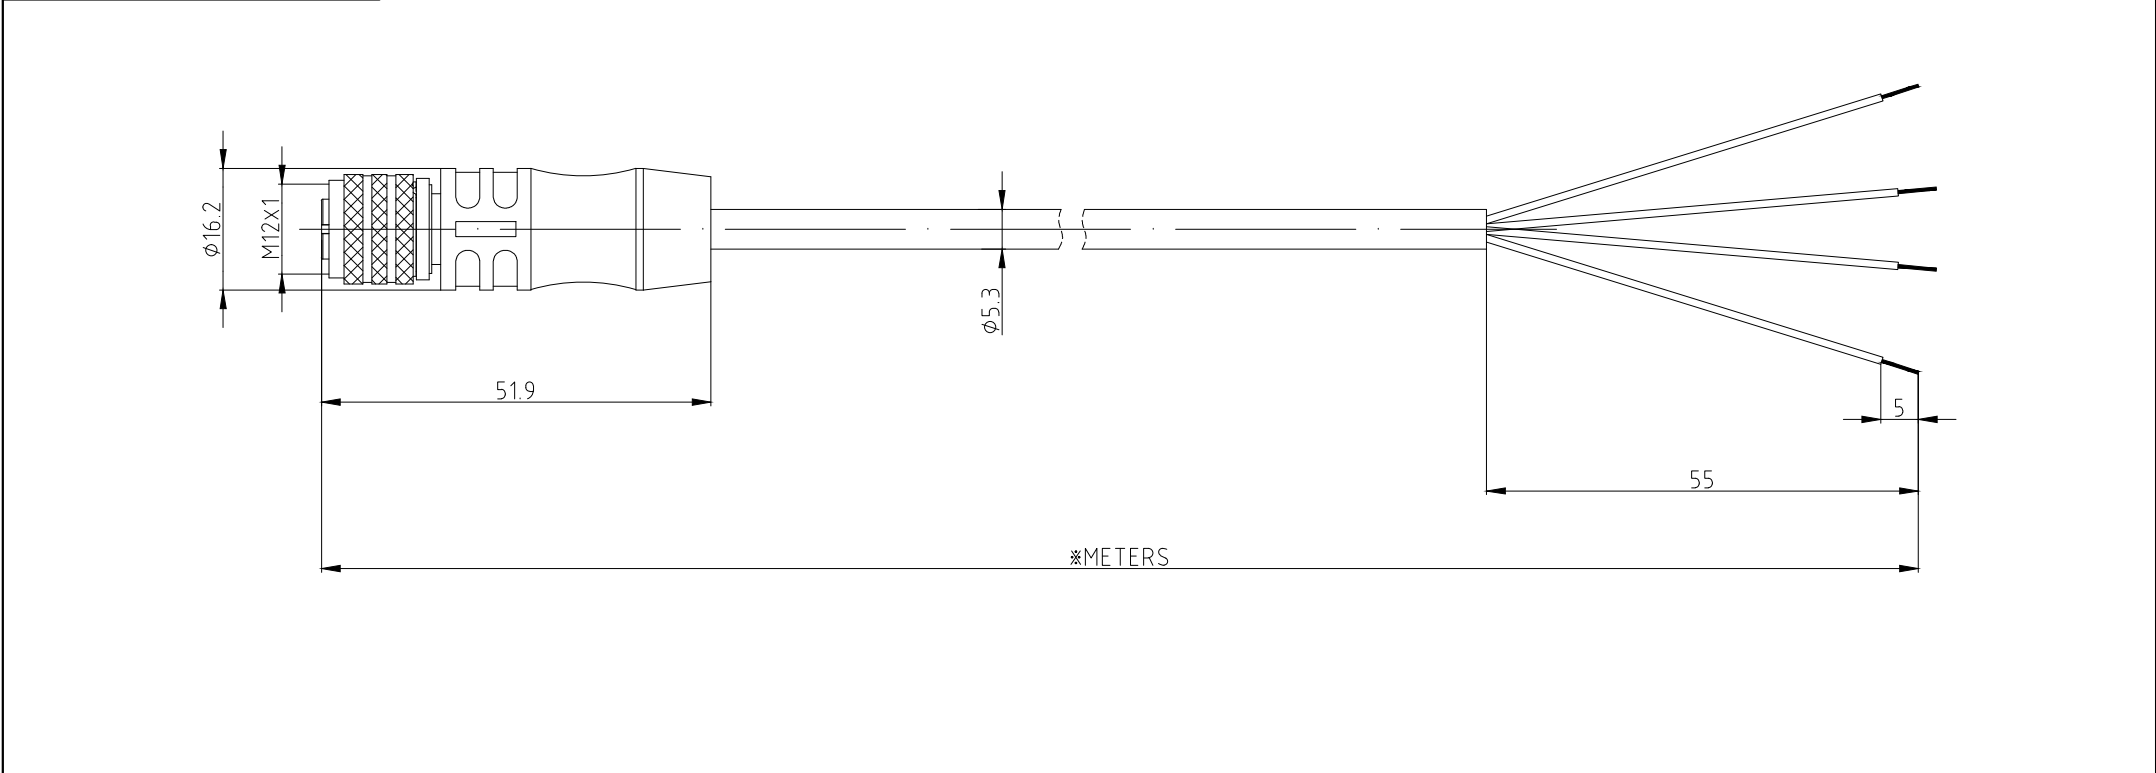

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT					
MILLIMETER		Tianjin Geneuo Technology Co.,Ltd			
Approved: Date:		Date: 2018.4.16		Description: EK4-※M/S10	
Process:YJ F Date:2018.5.24		Scale: 1:1			
Checked:WY Date:2018.5.3		3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	
Designed:LXH Date:2018.4.27				SOURCE DRAWING-FOR REFERENCE ONLY	
				REV A	