



FEMALE END VIEW




1=BN
2=BU
3=N/C
4=N/C

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FFPM/FKM
OPERATING CURRENT	4 A
OPERATING VOLTAGE	250 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	2 x 22 AWG
OPERATING TEMPERATURE	-20°C — +80°C
PROTECTION CLASS	IEC IP67

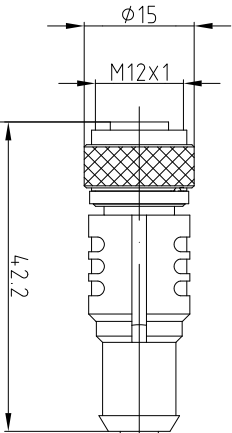

Ø5.2

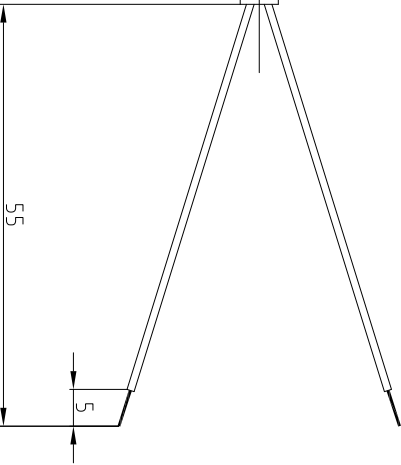

※METERS

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT		Tianjin Geneuo Technology Co.,Ltd		GSEE TECH	
MILLIMETER		Date: 2018.4.16	Description: EK4-21-※M/P00	www.gsee-tech.cn	REV A
Approved: Date:		Scale: 1:1		www.gsee-tech.com	
Process YJF Date:2018.5.24					
Checked NY Date:2018.5.3					
Designed LXH Date:2018.4.27		3RD Angle Projection		SOURCE DRAWING-FOR REFERENCE ONLY	