


FEMALE END VIEW

The diagram shows a circular cross-section with a vertical centerline. Five points are marked with circles and numbers: 1 at the bottom, 2 on the left, 3 at the top, 4 on the right, and 5 at the top-right. A curved arrow on the left indicates a counter-clockwise rotation.


1=BN
2=WH
3=BU
4=BK
5=GY



1=BN
2=WH
3=BU
4=BK
5=GY

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FPM/FKM
OPERATING CURRENT	4 A
OPERATING VOLTAGE	250 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)/SHIELD	5 x 22 AWG/POLYESTER FOIL SHIELD
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FPM/FKM
OPERATING CURRENT	4 A
OPERATING VOLTAGE	250 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)/SHIELD	5 x 22 AWG/POLYESTER FOIL SHIELD
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

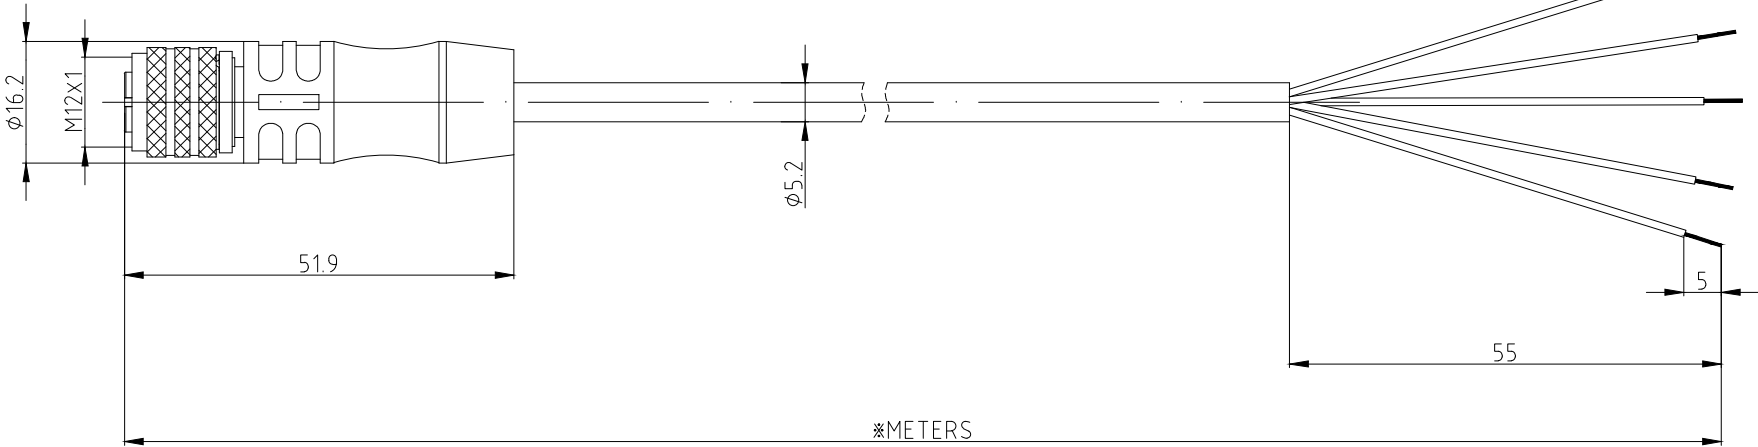

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT
MILLIMETER


Approved: Date:	
Process:YJF Date:2018.5.24	
Checked:WY Date:2018.5.3	
Designed:LXH Date:2018.4.27	

Tianjin Geneuo Technology Co.,Ltd

Date: 2018.4.16

Scale: 1:1

3RD Angle Projection



Description:

EK4.5-※M/S10

www.gsee-tech.cn
www.gsee-tech.com

REV
A

SOURCE DRAWING-FOR REFERENCE ONLY