



FEMALE END VIEW



1=WH
2=BN
3=GN
4=YE
5=GY
6=PK
7=BU
8=RD
9=OG
10=TN
11=BK
12=VT

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FPM/FKM
OPERATING CURRENT	2 A
OPERATING VOLTAGE	60 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)/SHIELD	12 x 24 AWG/POLYESTER FOIL SHIELD
OPERATING TEMPERATURE	-20°C — +80°C
PROTECTION CLASS	IEC IP67

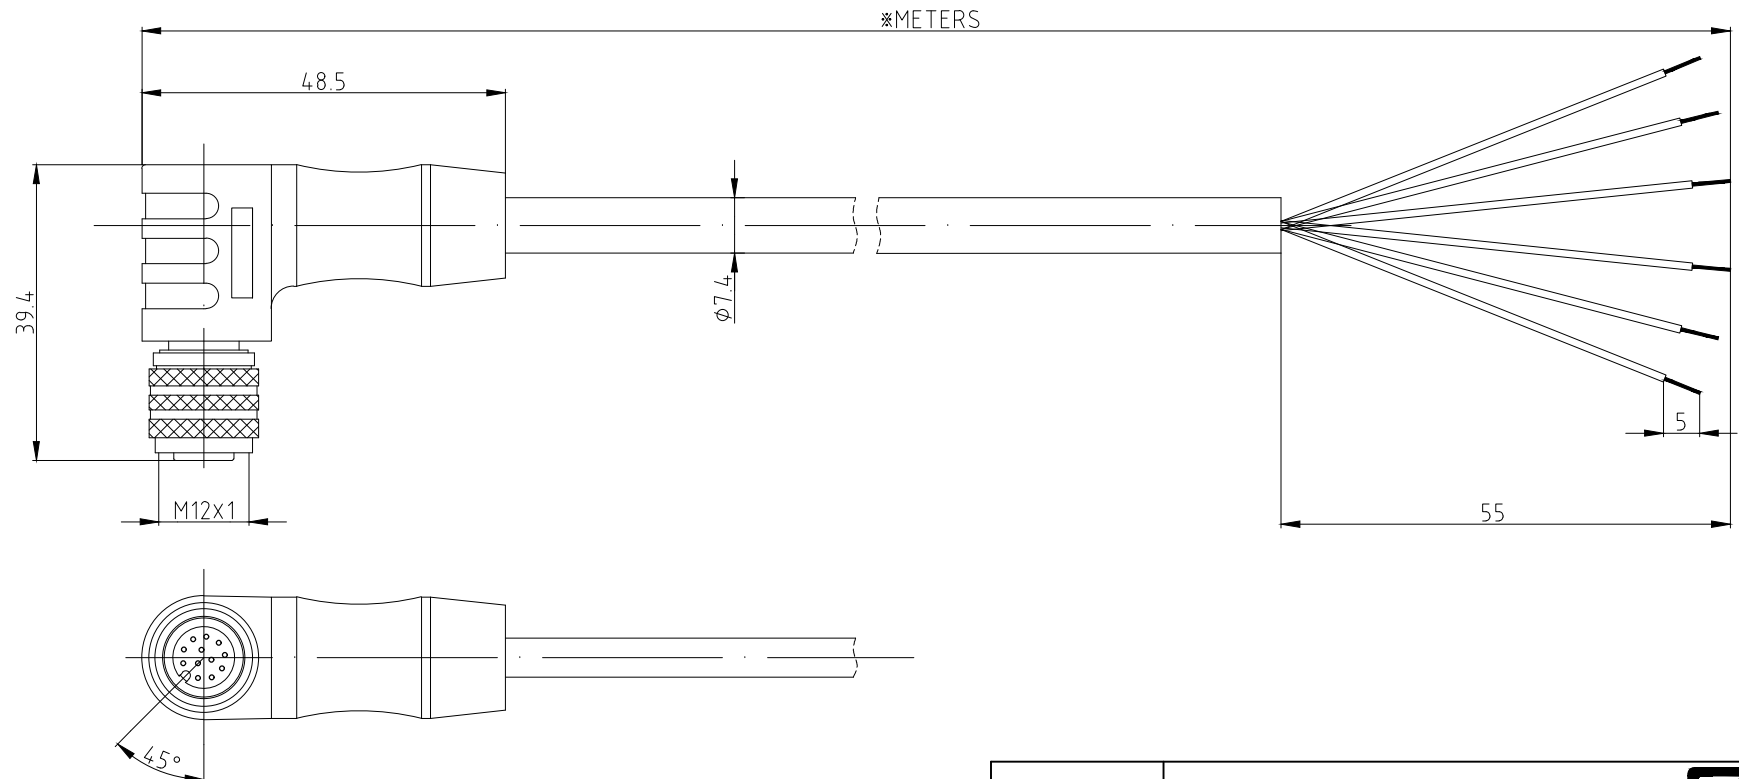

CABLE LENGTH TOLERANCE

ALL LENGTHS
+4% (OR 50mm) OF LENGTH
-0% (OR 0mm) OF LENGTH
WHICHEVER IS GREATER

STRIP LENGTH TOLERANCE

0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm


UNIT OF MEASUREMENT
MILLIMETER

Tianjin Geneuo Technology Co., Ltd

Approved:
Date:
Process: YJ F
Date: 2018.5.24
Checked: WY
Date: 2018.5.3
Designed: LXH
Date: 2018.4.27

Date: 2018.4.16
Scale: 1:1

3RD Angle
Projection



Description:
ELK12-※M/S10

www.gsee-tech.cn
www.gsee-tech.com

SOURCE DRAWING-FOR REFERENCE ONLY

REV
A