



FEMALE END VIEW



1=BN
2=BU
3=WH
4=GN 11=GY/PK
5=PK 12=RD/BU
6=YE 13=WH/GN
7=BK 14=BN/GN
8=GY 15=WH/YE
9=RD 16=YE/BN
10=VT 17=WH/GY

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FPM/FKM
OPERATING CURRENT	1.5 A
OPERATING VOLTAGE	30 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	17x26 AWG
OPERATING TEMPERATURE	-25°C — +80°C
PROTECTION CLASS	IEC IP67

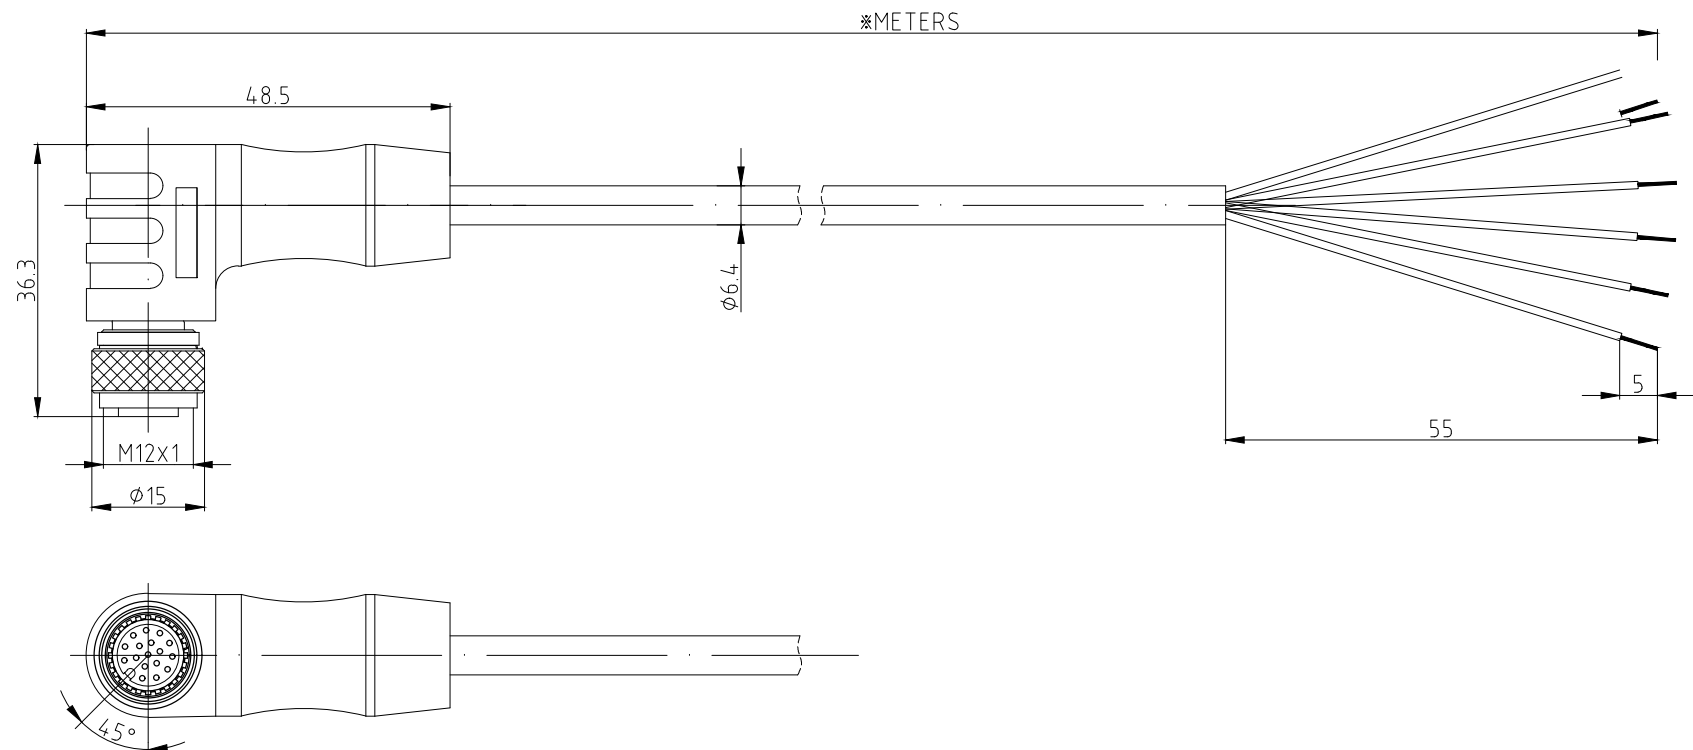

CABLE LENGTH TOLERANCE

ALL LENGTHS
+4% (OR 50mm) OF LENGTH
-0% (OR 0mm) OF LENGTH
WHICHEVER IS GREATER

STRIP LENGTH TOLERANCE

0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

UNIT OF MEASUREMENT
MILLIMETER

Tianjin Geneuo Technology Co.,Ltd

Approved:
Date:

Date: 2018.4.16

Description:

ELK17-※M/P00


Process:YJ F
Date:2018.5.24

Scale: 1:1

Checked:WY
Date:2018.5.3

Designed:LXH
Date:2018.4.27

3RD Angle
Projection



www.gsee-tech.cn
www.gsee-tech.com

REV
A

SOURCE DRAWING-FOR REFERENCE ONLY

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE