



FEMALE END VIEW



1=BN
2=N/C
3=BU
4=BK

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FPM/FKM
OPERATING CURRENT	4 A
OPERATING VOLTAGE	250 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	3 x 22 AWG
OPERATING TEMPERATURE	-20°C — +80°C
PROTECTION CLASS	IEC IP67

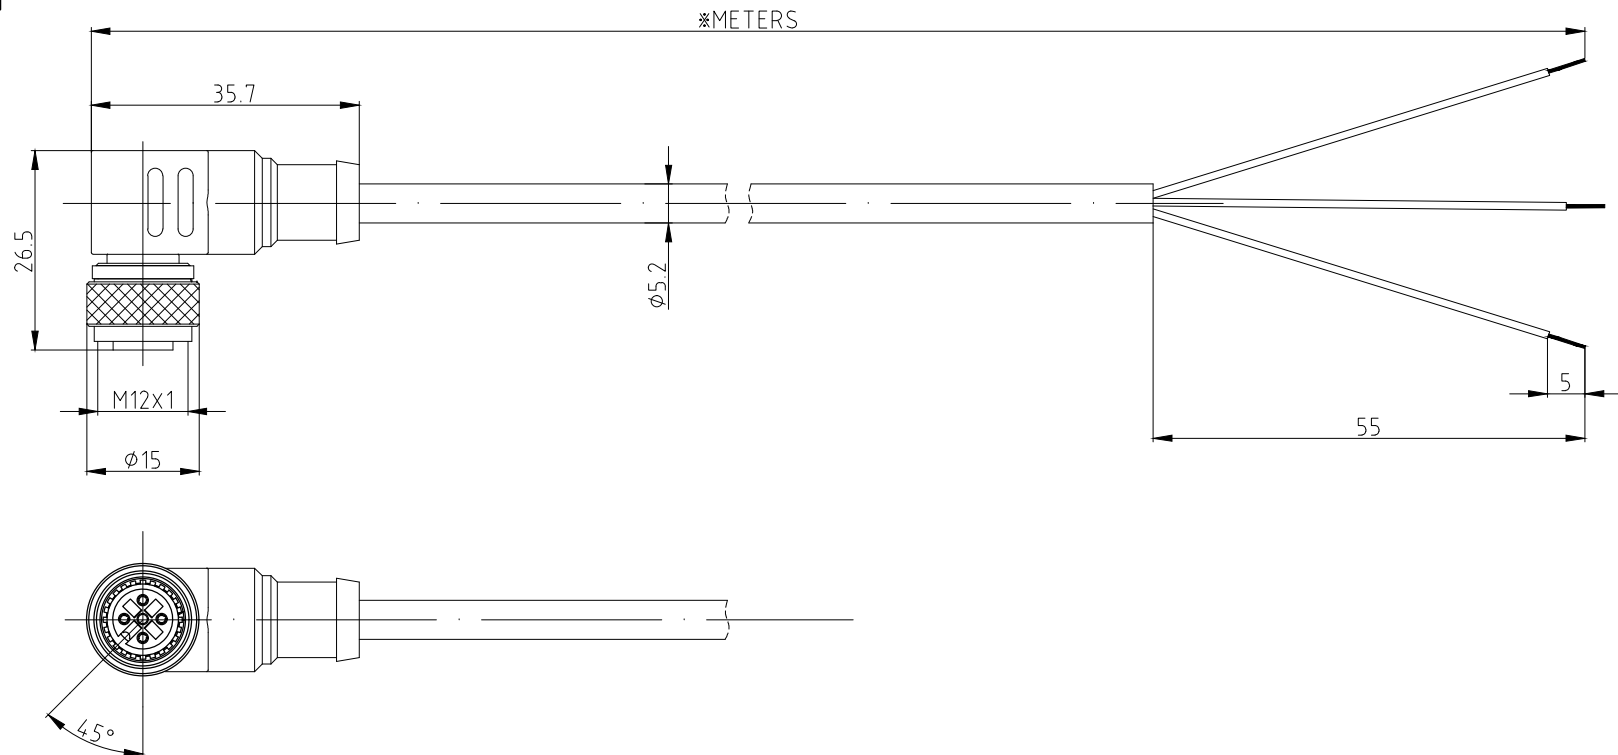

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT

MILLIMETER

Tianjin Geneuo Technology Co.,Ltd



Approved:

Date:

Date:

2018.4.16

Description:

ELK3-※M/P00

Process:YJ F

Date:2018.5.24

Scale:


1:1

Checked:WY

Date:2018.5.3

Designed:LXH

Date:2018.4.27

3RD Angle
Projection

www.gsee-tech.cn
www.gsee-tech.com

REV
A

SOURCE DRAWING-FOR REFERENCE ONLY