
FEMALE END VIEW 3 4 1

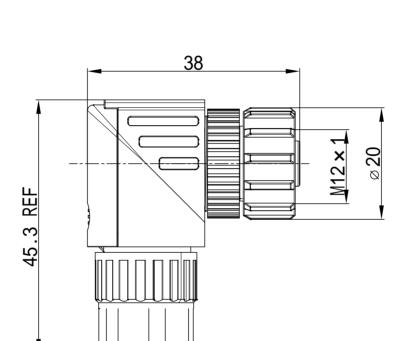

| SPECIFICATIONS | | | | | |
|------------------------|--|--|--|--|--|
| ZINC ALLOY/NICKEL | | | | | |
| BRASS/GOLD | | | | | |
| ZINC ALLOY/NICKEL | | | | | |
| NBR | | | | | |
| 4A | | | | | |
| 250V | | | | | |
| -25 ° C +85 ° C | | | | | |
| IEC IP67 | | | | | |
| 6-8mm | | | | | |
| SCREW CONNECTION | | | | | |
| 24-18AWG(0.25-0.75mm2) | | | | | |
| | | | | | |

| | | | | | UNIT OF MEASUREMENT MILLIMETER | Tianji | in Geneuo | Technology Co.,Lt | GSEE TECH | |
|-----|-------|--------------------------|----|---------|--------------------------------|--|-----------------------------|-------------------|--|----------|
| | | | | | | Approved: Date: Process:YJF Date: | Date: 2021.06.07 Scale: 1:1 | | Description: ELK4218-0/ | 9 |
| REV | COUNT | DESCRIPTION OF REVISIONS | BY | CHECKED | DATE | Checked: WY Date: Designed:WYL Date:2021.06.07 | 3RD Angle Projection | ⊕ □ | www.gsee-tech.cn www.gsee-tech.com SOURCE DRAWING-FOR REFERENCE ONLY | REV A |