

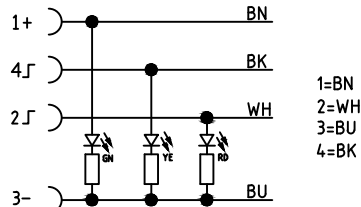
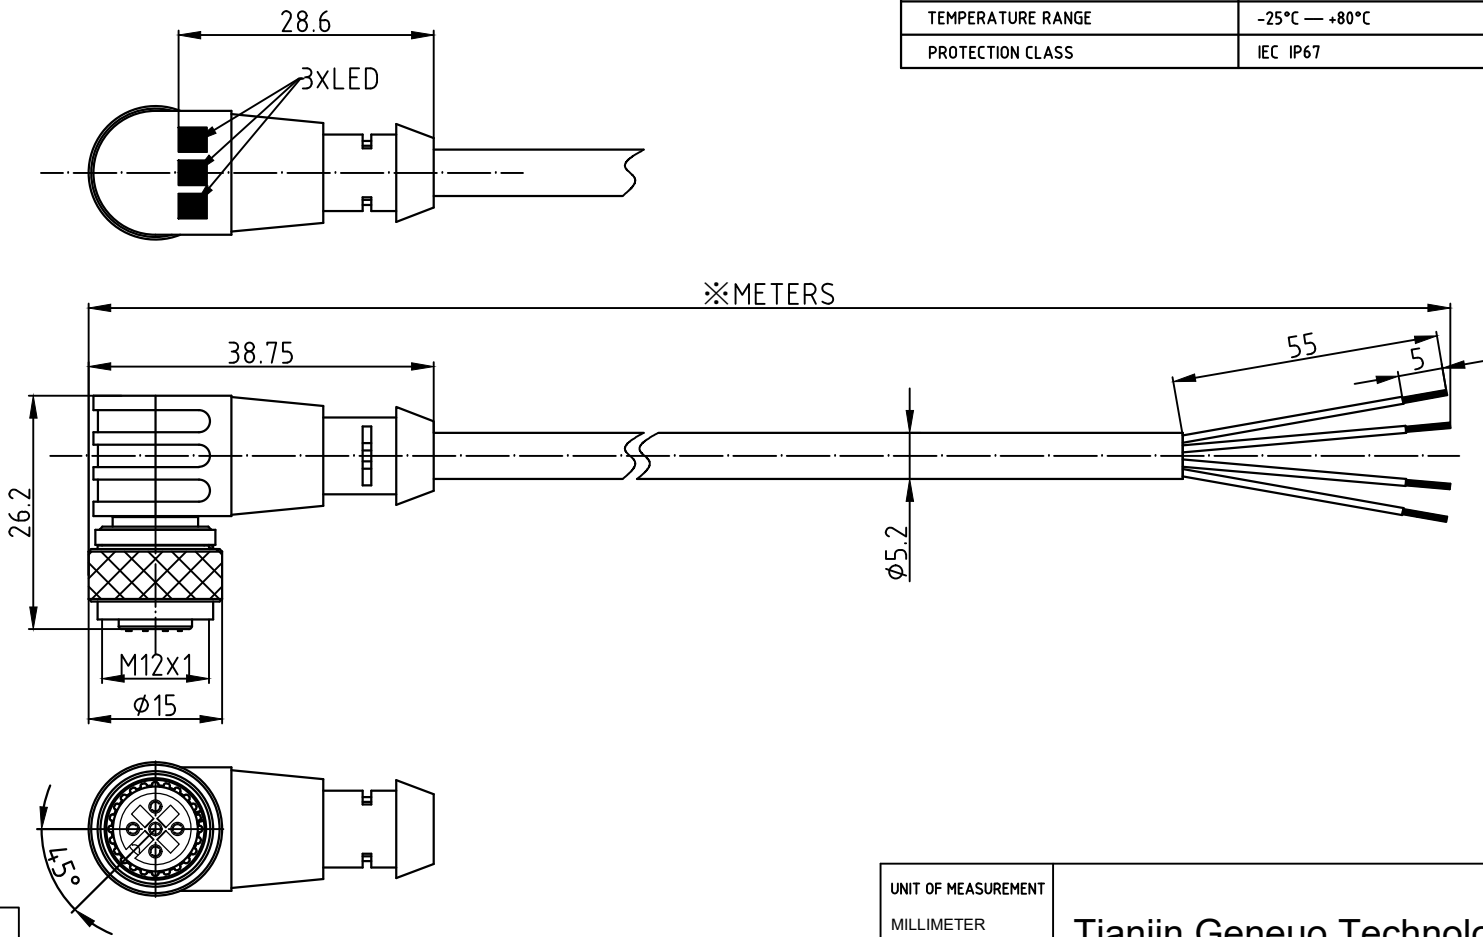


FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
	 1=BN 2=WH 3=BU 4=BK	CONTACT CARRIER MATERIAL	TPU GF
		MOLDED HEAD MATERIAL/COLOR	TPU/CLEAR
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BARSS/NICKEL
		RATED CURRENT [A]	4 A
		RATED VOLTAGE [V]	10-30VDC
		OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS[AWG]	4X22AWG
		TEMPERATURE RANGE	-25°C — +80°C
		PROTECTION CLASS	IEC IP67



CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0%(OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT		GT GSEE TECH Tianjin Geneuo Technology Co.,Ltd		
MILLIMETER				
Approved: Date:	Date: 2019.02.02	Description: ELK4P3-※M/P00		
Process:YJF Date:2019.3.6	Scale: 1:1			
Checked: WY Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	REV A
Designed:WL Date:2019.02.02			SOURCE DRAWING-FOR REFERENCE ONLY	