



FEMALE END VIEW



1=BN
2=WH
3=BU
4=BK
5=GY
6=PK

SPECIFICATIONS

CONTANCT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FPM/FKM
OPERATING CURRENT	2 A
OPERATING VOLTAGE	60 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)/SHIELD	6 x 24 AWG/POLYESTER FOIL SHIELD
OPERATING TEMPERATURE	-20°C — +80°C
PROTECTION CLASS	IEC IP67

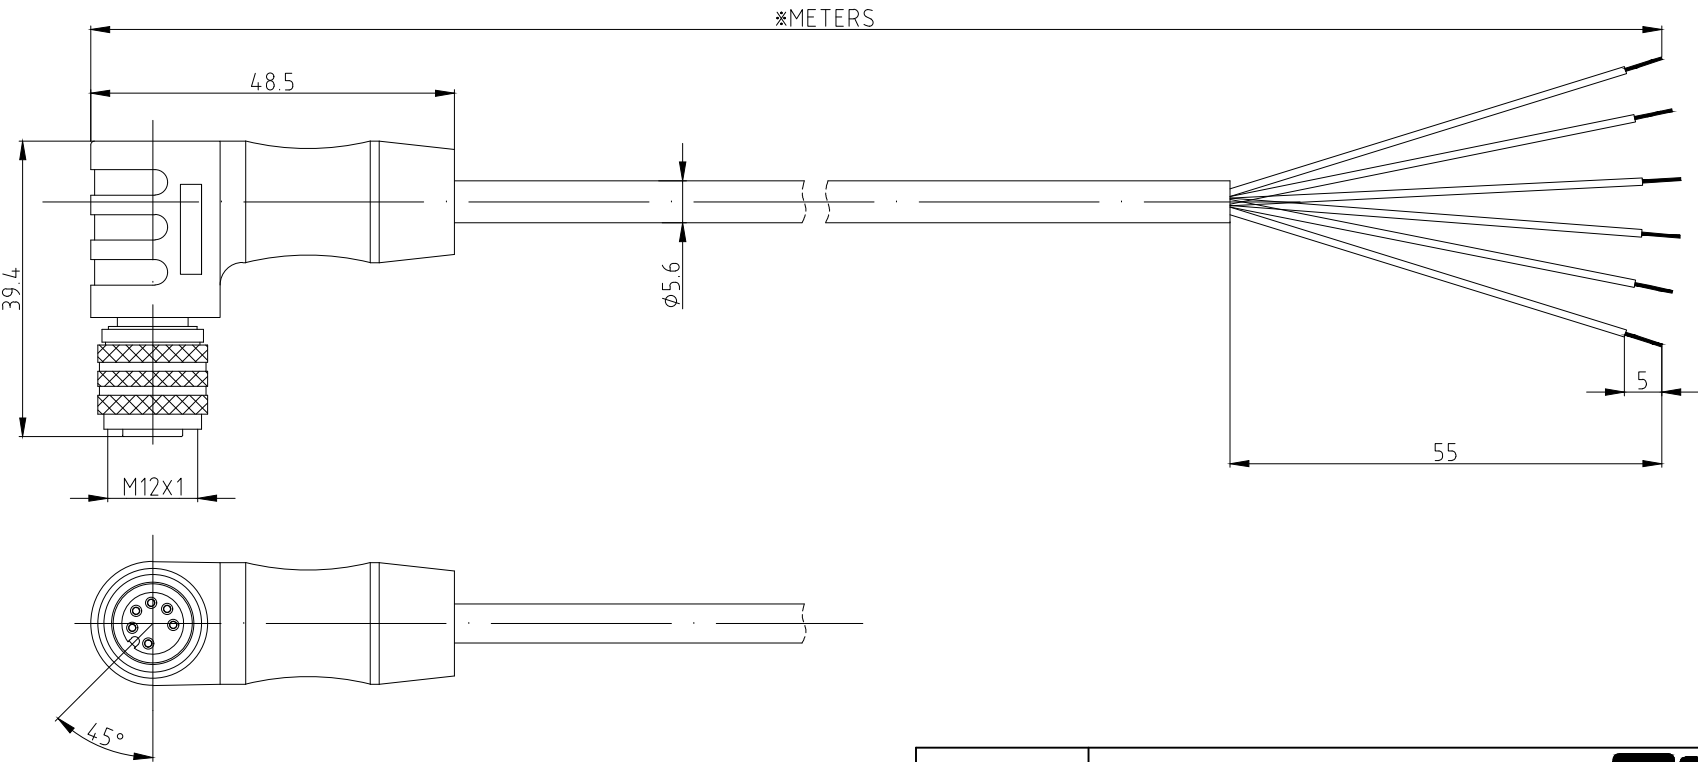

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0%(OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT
MILLIMETER

Approved:
Date:

Process:YJ F
Date:2018.5.24

Checked:WY
Date:2018.5.3

Dsigned:LXH
Date:2018.4.27

Tianjin Geneuo Technology Co.,Ltd

3RD Angle
Projection

Date: 2018.4.16

Scale: 1:1

www.gsee-tech.cn
www.gsee-tech.com

SOURCE DRAWING-FOR REFERENCE ONLY

Description:
ELK6-※M/S10

REV
A

www.gsee-tech.cn
www.gsee-tech.com