



MALE END VIEW



1=WH
2=BN
3=GN
4=YE
5=GY
6=PK
7=BU
8=RD
9=OG
10=TN
11=BK
12=VT


SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FPM/FKM
OPERATING CURRENT	2 A
OPERATING VOLTAGE	60 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)/SHIELD	12 x 24 AWG/POLYESTER FOIL SHIELD
OPERATING TEMPERATURE	-20°C — +80°C
PROTECTION CLASS	IEC IP67

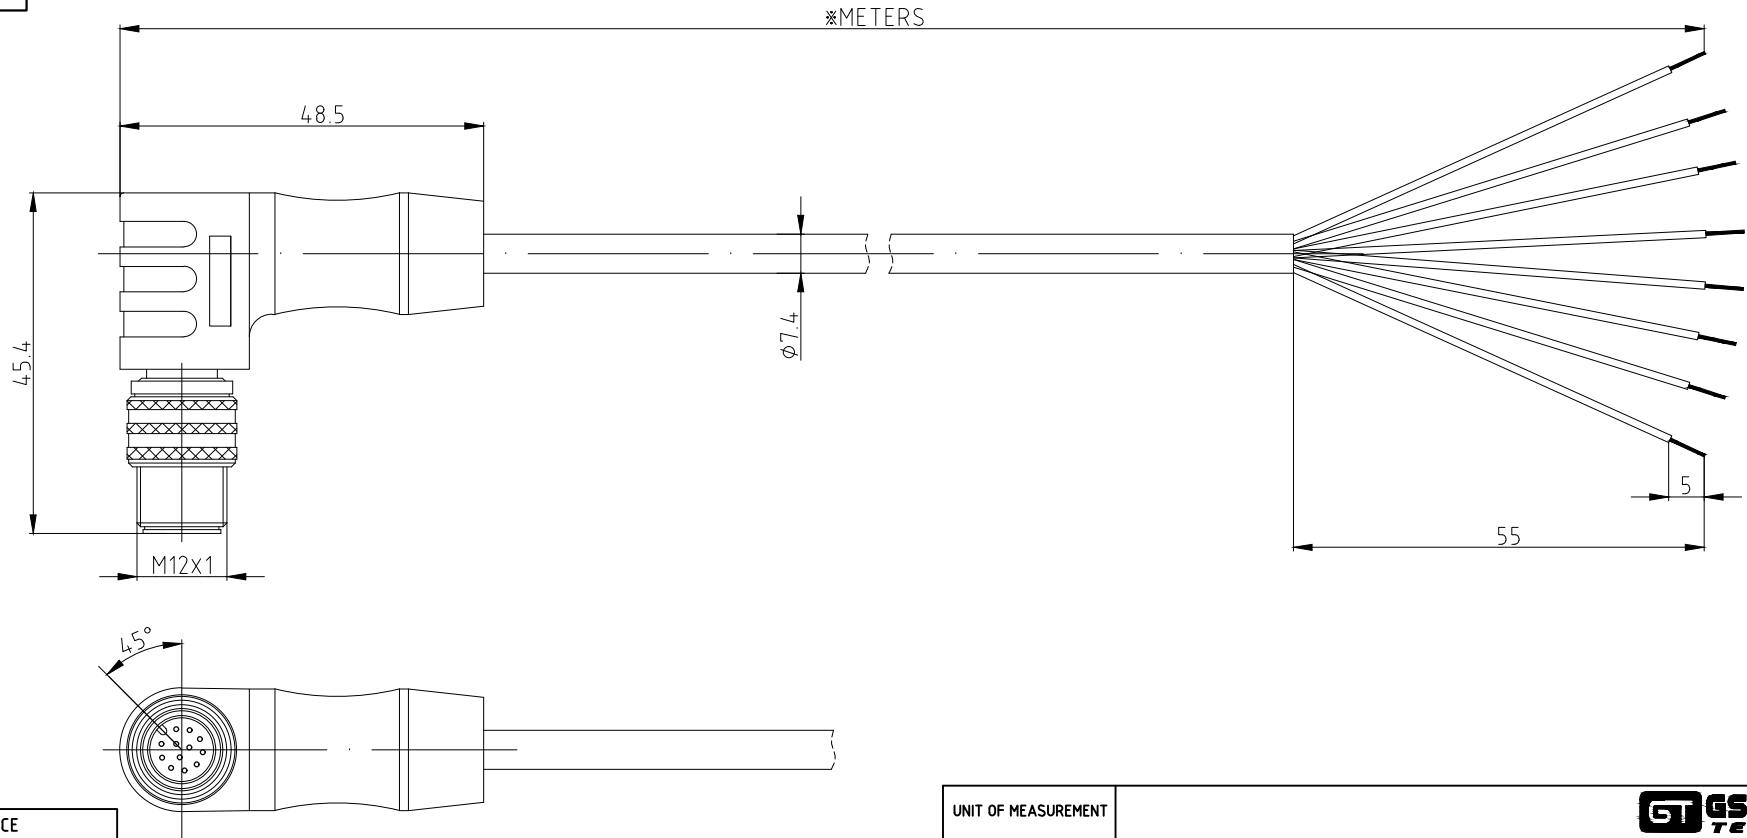

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0%(OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER		GSEE TECH Tianjin Geneuo Technology Co.,Ltd			
Approved: Date:		Date: 2018.4.16		Description: ELZ12-※M/S10	
Process:YJ F Date:2018.5.24		Scale: 1:1			
Checked:WY Date:2018.5.3		3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	REV A
Designed:LXH Date:2018.4.27				SOURCE DRAWING-FOR REFERENCE ONLY	