


FEMALE END VIEW




1.BN
2.N/C
3.BU
4.BK

SPECIFICATIONS

CONTACT CARRIER MATERIAL	TPU GF
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	STAINLESS/CLEAR
RATED CURRENT [A]	4A
RATED VOLTAGE [V]	MAX.250V
OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS(AWG)	3X22AWG
TEMPERATURE RANGE	-25°C — +80°C
PROTECTION CLASS	IEC IP67

※METERS

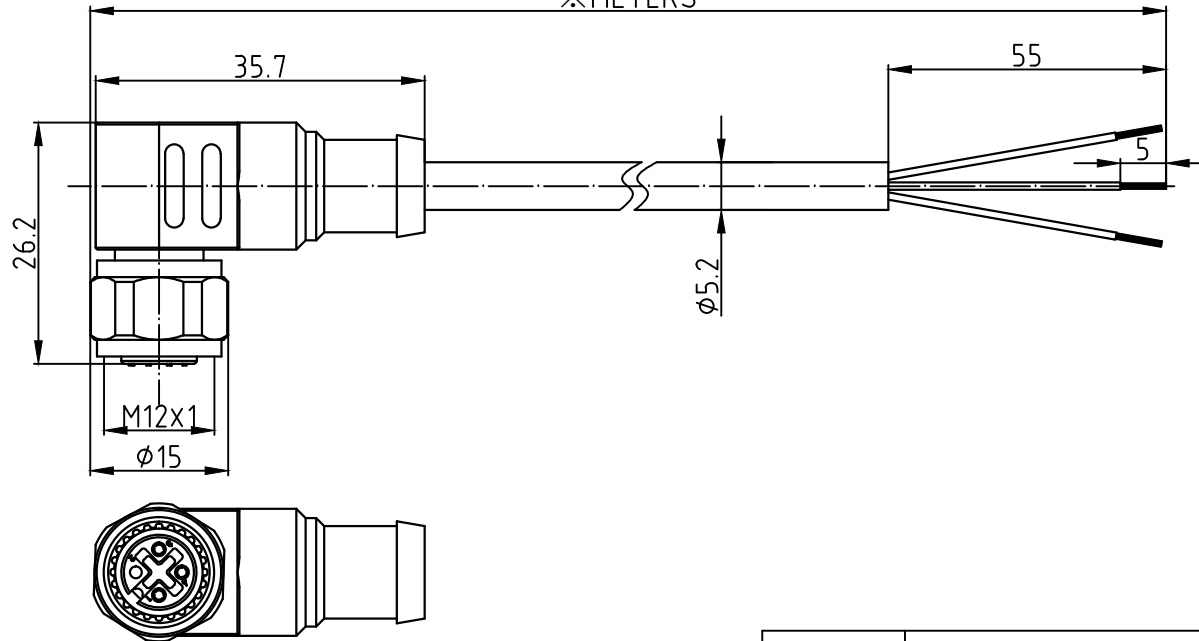

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0%(OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT		Tianjin Geneuo Technology Co.,Ltd			
MILLIMETER					
Approved: Date:	Date: 2019.02.02	Description : EWDLK3-※M/P00			
Process:YJF Date:2019.3.6	Scale: 1:1				
Checked: WY Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com		REV A
Designed:WL Date:2019.02.02			SOURCE DRAWING-FOR REFERENCE ONLY		