

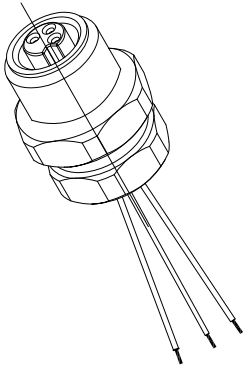


SPECIFICATIONS			
CONTACT CARRIER MATERIAL/COLOR	PA/BLACK		
CONTACTS	BRASS/GOLD		
HOUSING MATERIAL/PLATING	BRASS/NICKEL		
O-RING MATERIAL	NBR		
OPERATING CURRENT	1 A		
OPERATING VOLTAGE	60 V		
CONDUCTOR INSULATION MATERIAL	PVC		
NUMBER OF CONDUCTORS (AWG)	3 x 26 AWG		
OPERATING TEMPERATURE	-20°C — +85°C		
PROTECTION CLASS	IEC IP67		

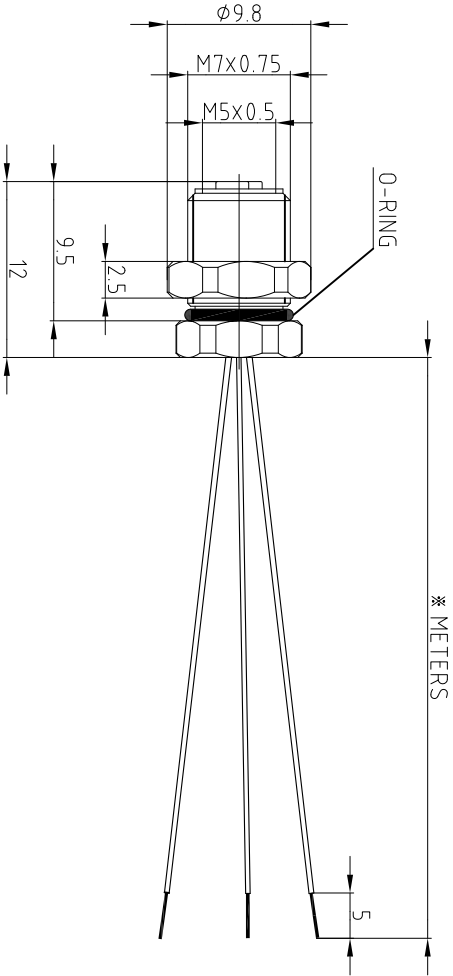

CABLE LENGTH	TOLERANCE
ALL LENGTHS	$\pm 4\%$ (OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0 mm
8 - 29mm	± 1.5 mm
30 - 49mm	± 2.0 mm
50 - 69mm	± 3.0 mm
70 - 100mm	± 4.0 mm
over 100mm	± 5.0 mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER		Tianjin Geneuo Technology Co.,Ltd			
Approved:	Date:	Date:	Description:		
Process:	Date:	Scale:	FBK31-#/M7		
Checked:	Date:	3RD Angle Projection	www.gsee-tech.cn www.gsee-tech.com		
Designed:	Date:		SOURCE DRAWING-FOR REFERENCE ONLY		
			REV A		