



FEMALE END VIEW

SUGGESTED PANEL CUT OUT


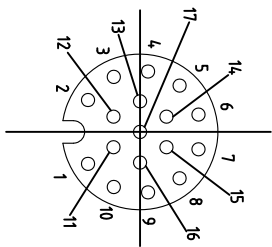


- 1=BN
2=BU
3=WH
4=GN
5=PK
6=YE
7=BK
8=GY
9=RD
10=VT
11=GY/PK
12=RD/BU
13=WH/GN
14=BN/GN
15=WH/YE
16=YE/BN
17=WH/GY



SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FKM/NBR
OPERATING CURRENT	1.5 A
OPERATING VOLTAGE	30 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	17 x 26 AWG
OPERATING TEMPERATURE	-20°C — +85°C
PROTECTION CLASS	IEC IP67

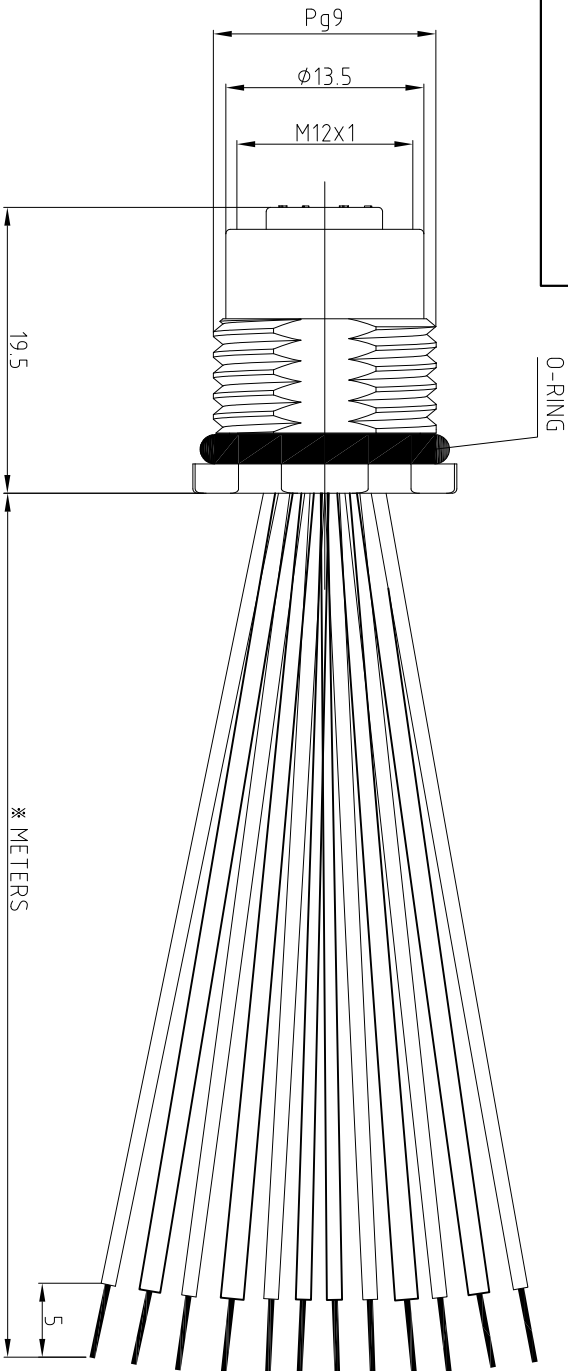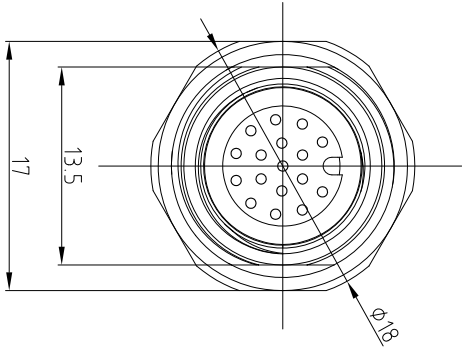

※ METERS

CABLE LENGTH

ALL LENGTHS

±4%(OR 50mm) OF LENGTH
-0%(OR 0mm) OF LENGTH
WHICHEVER IS GREATER

STRIP LENGTH

0 - 7mm

8 - 29mm

30 - 49mm

50 - 69mm

70 - 100mm

over 100mm

± 1.0mm

± 1.5mm

± 2.0mm

± 3.0mm

± 4.0mm

± 5.0mm

UNIT OF MEASUREMENT

MILLIMETER

Tianjin Geneuo Technology Co., Ltd

Date: 2018.4.27

Scale: 1:1

3RD Angle Projection

www.gsee-tech.cn

www.gsee-tech.com

SOURCE DRAWING-FOR REFERENCE ONLY

REV A

DATE: 2018.4.27

DATE: 2018.5.24

DATE: 2018.5.3



Description:

FEK171-※

www.gsee-tech.cn

www.gsee-tech.com

SOURCE DRAWING-FOR REFERENCE ONLY

REV A

DATE: 2018.4.27

DATE: 2018.5.24

DATE: 2018.5.3