


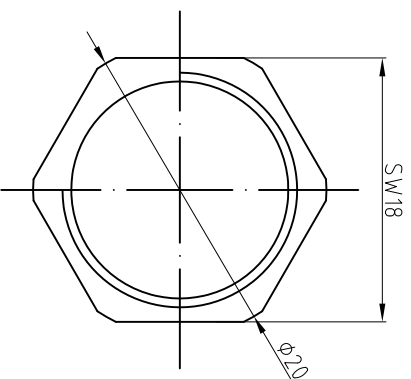
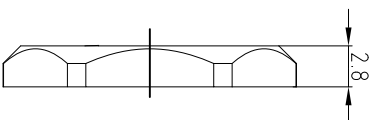
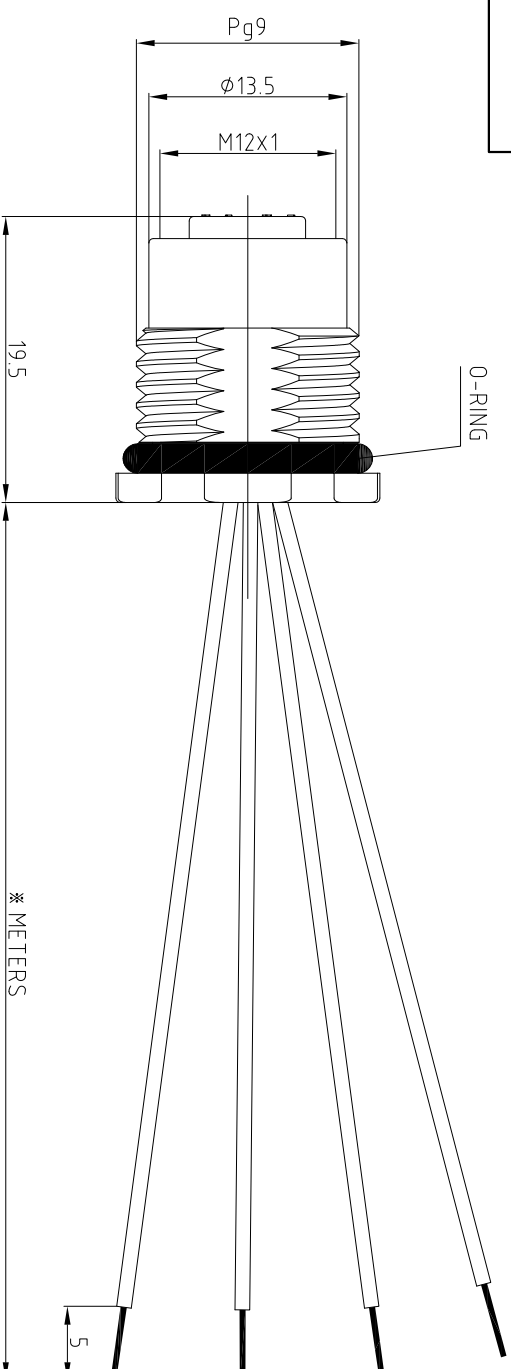


FEMALE END VIEW

SUGGESTED PANEL CUT OUT

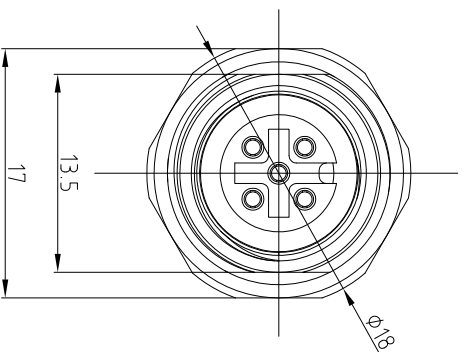

1=BN
2=W/H
3=BU
4=BK
5=GN/YE



SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FKM/NBR
OPERATING CURRENT	4 A
OPERATING VOLTAGE	250 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	4 x 22+1x20 AWG
OPERATING TEMPERATURE	-20°C — +85°C
PROTECTION CLASS	IEC IP67

CABLE LENGTH	TOLERANCE
ALL LENGTHS	±4%(OR 50mm) OF LENGTH -0%(OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

UNIT OF MEASUREMENT
MILLIMETER

Tianjin Geneuo Technology Co., Ltd



Approved:
Date:

Date: 2018.4.27

Description:

FEK51-*

Process:YJF

Scale: 1:1

Checked:Y

3RD Angle
Projection

Date:2018.5.3

Designed:LXH

Date:2018.4.27

Source Drawing-For Reference Only



www.gsee-tech.cn
www.gsee-tech.com

REV
A

REV
COUNT

DESCRIPTION OF REVISIONS

BY

CHECKED

DATE