



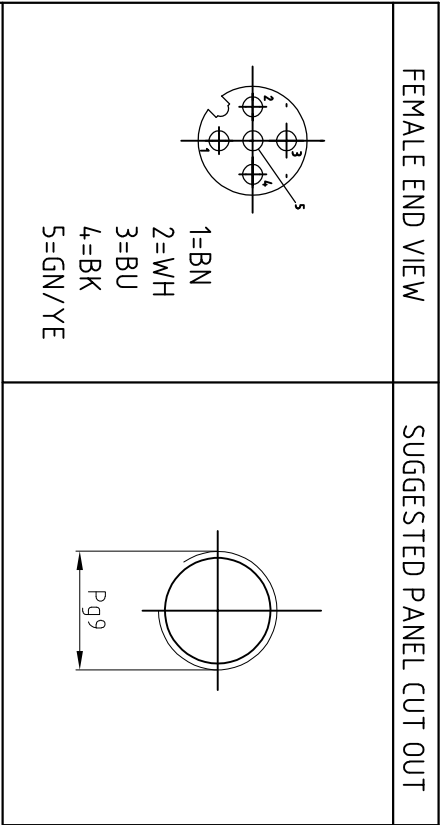

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FKM/MBR
OPERATING CURRENT	4 A
OPERATING VOLTAGE	250 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	4 x 22+X20 AWG
OPERATING TEMPERATURE	-20°C — +85°C
PROTECTION CLASS	IEC IP67

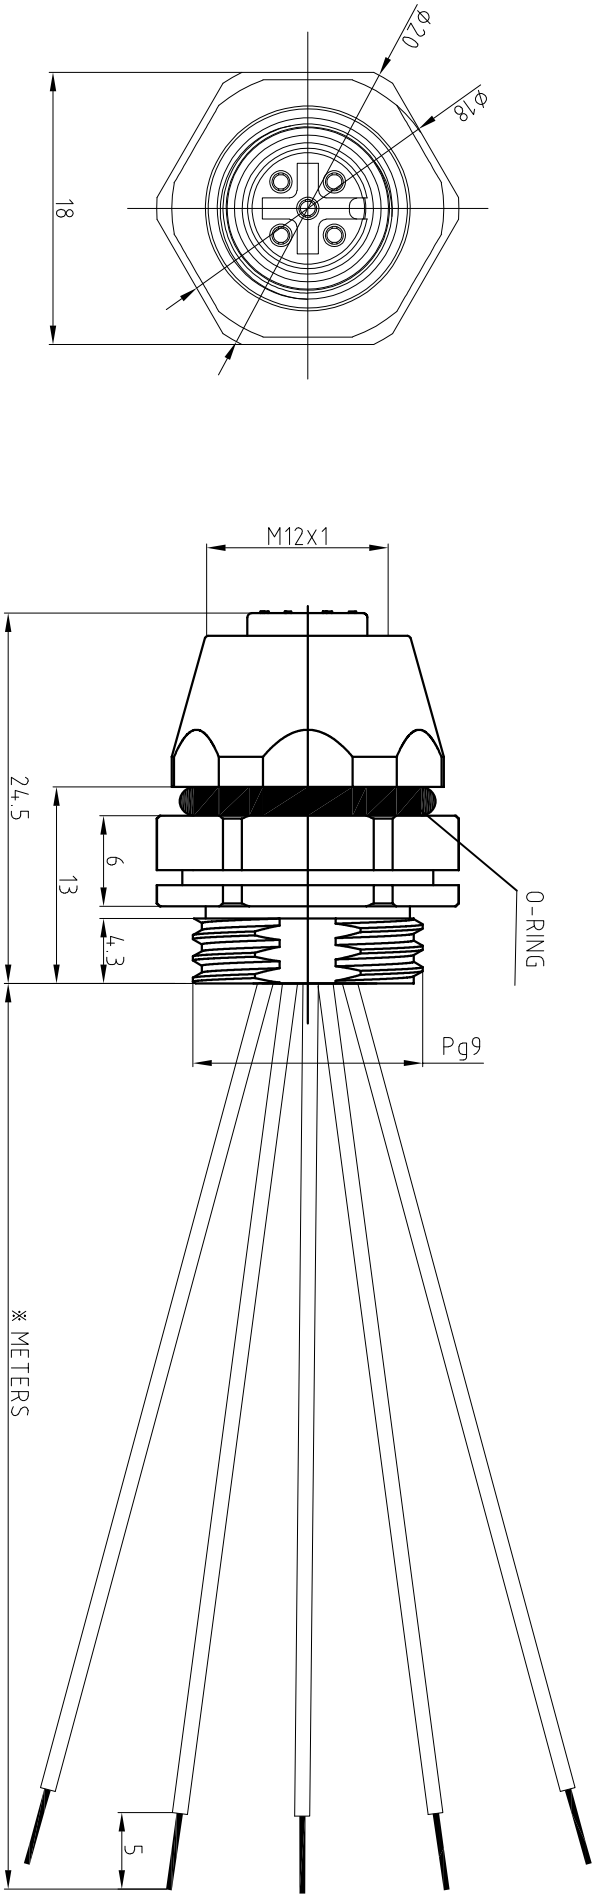

CABLE LENGTH	TOLERANCE
ALL LENGTHS	±4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 10mm
8 - 29mm	± 15mm
30 - 49mm	± 20mm
50 - 69mm	± 30mm
70 - 100mm	± 40mm
over 100mm	± 50mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER		Tianjin Geneuo Technology Co., Ltd		GSEE TECH	
Approved: Date:	Date: 2018.4.27	Description: FEK52-※		www.gsee-tech.cn www.gsee-tech.com	
Process:YJF Date:2018.5.24	Scale: 1:1				
Checked:WY Date:2018.5.3	3RD Angle Projection				
Designed:LXH Date:2018.4.27		SOURCE DRAWING-FOR REFERENCE ONLY		REV A	