



FEMALE END VIEW

SUGGESTED PANEL CUT OUT




- 1=BN
- 2=WH
- 3=BU
- 4=BK
- 5=GY
- 6=PK



SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FKM/NBR
OPERATING CURRENT	2 A
OPERATING VOLTAGE	60 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	6 x 24 AWG
OPERATING TEMPERATURE	-20°C — +85°C
PROTECTION CLASS	IEC IP67

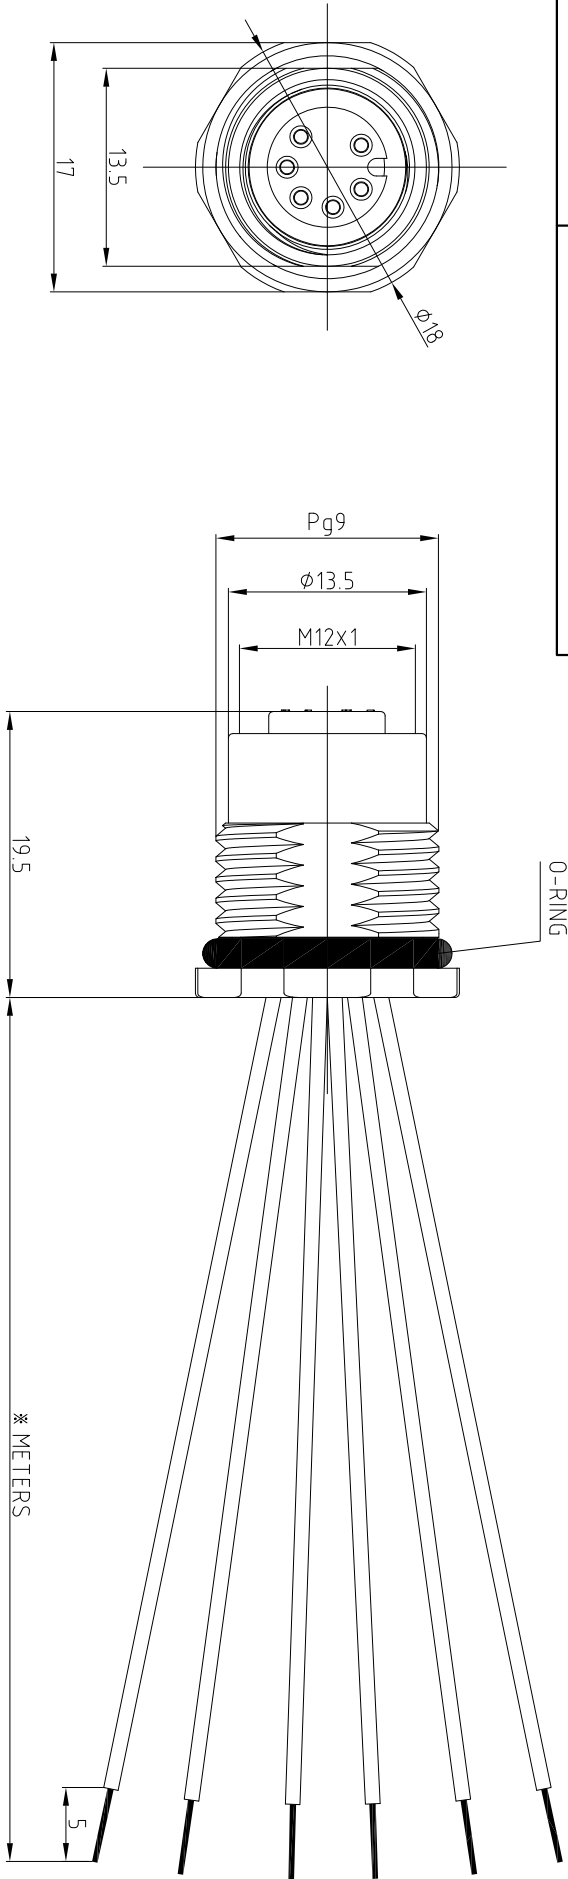

CABLE LENGTH

TOLERANCE

ALL LENGTHS

±4%(OR 50mm) OF LENGTH
-0%(OR 0mm) OF LENGTH
WHICHEVER IS GREATER

STRIP LENGTH

TOLERANCE

0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

UNIT OF MEASUREMENT

MILLIMETER

Approved: Date: 2018.4.27

Process YJF Date: 2018.5.24 Scale: 1:1

Checked Y Date: 2018.5.3
Designed XH Date: 2018.4.27

Tianjin Geneuo Technology Co., Ltd



Description: FEK61-*

www.gsee-tech.cn
www.gsee-tech.com

REV A

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

