


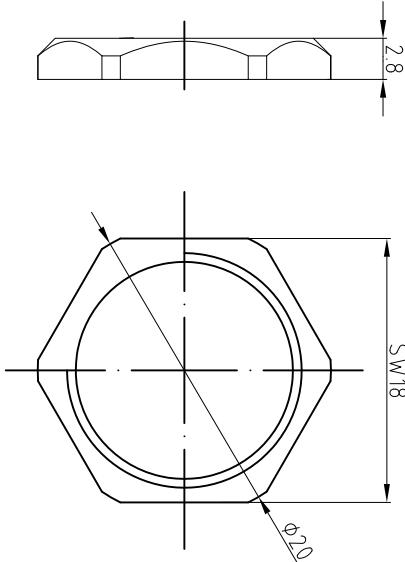
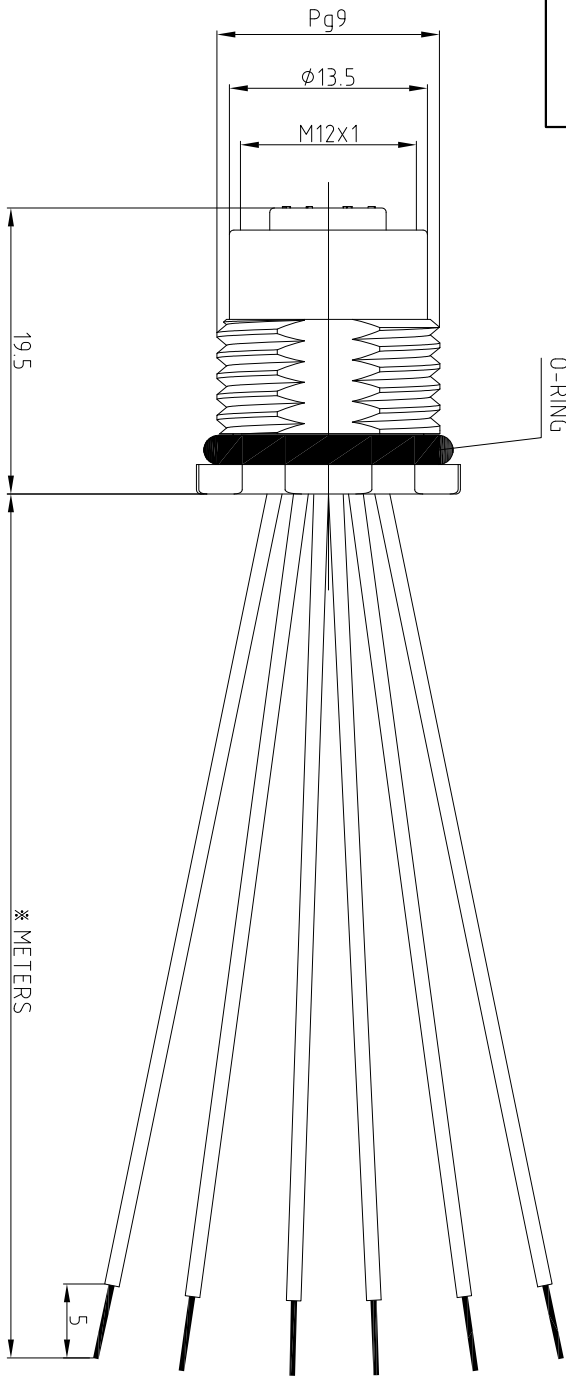


FEMALE END VIEW

SUGGESTED PANEL CUT OUT

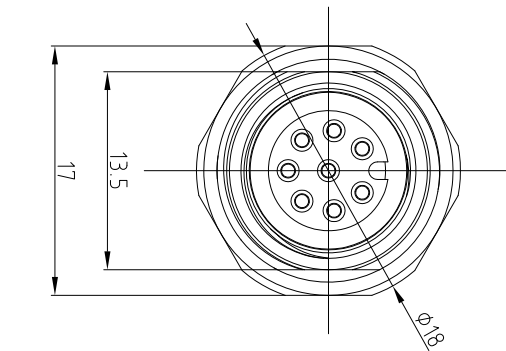

1=WH
2=BN
3=GN
4=YE
5=GY
6=PK
7=BU
8=RD



SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	FKM/NBR
OPERATING CURRENT	2 A
OPERATING VOLTAGE	60 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	8 x 24 AWG
OPERATING TEMPERATURE	-20°C — +85°C
PROTECTION CLASS	IEC IP67

CABLE LENGTH	TOLERANCE
ALL LENGTHS	±4.6%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

UNIT OF MEASUREMENT
MILLIMETER

Tianjin Geneuo Technology Co., Ltd



Approved:

Date: 2018.4.27

Description:

FEK81-*

Process YJF

Scale: 1:1

Checked Y

3RD Angle Projection

Designed LXH

www.gsee-tech.cn

www.gsee-tech.com

Date: 2018.4.27

SOURCE DRAWING-FOR REFERENCE ONLY

REV A