
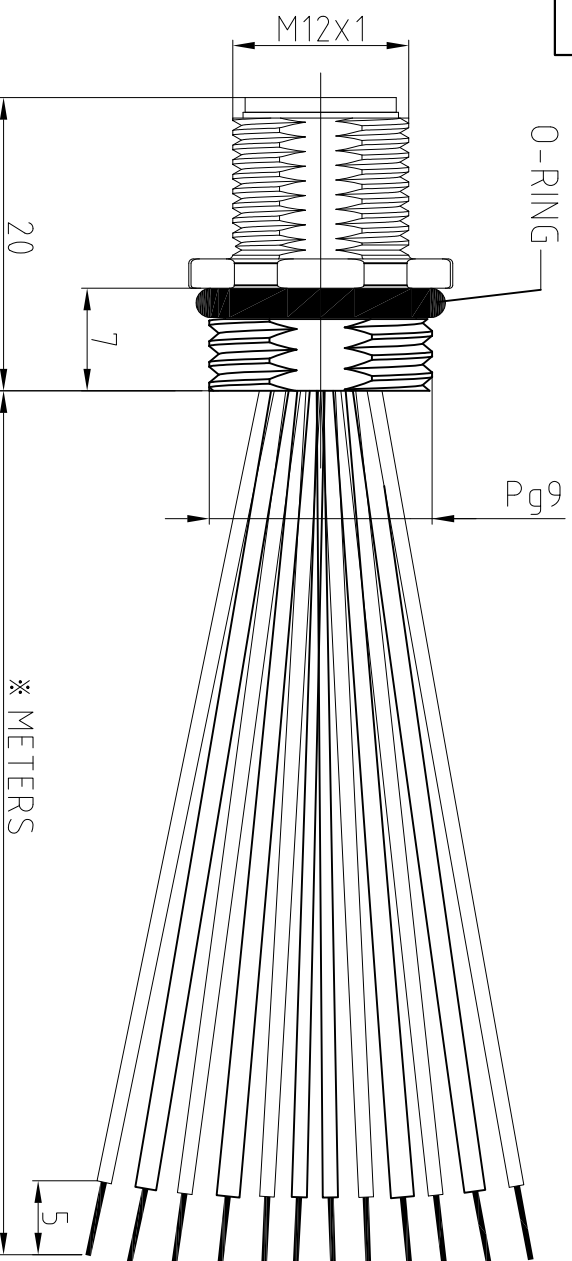
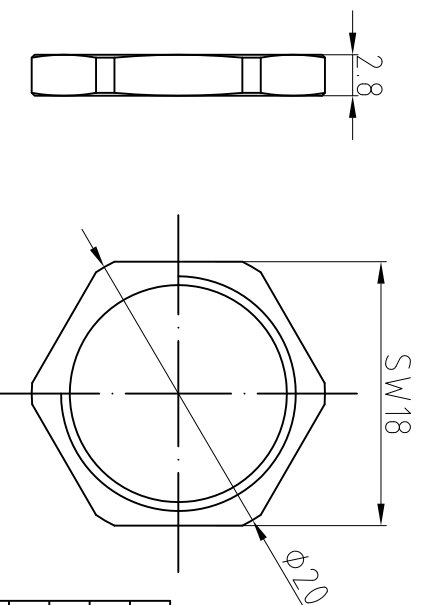
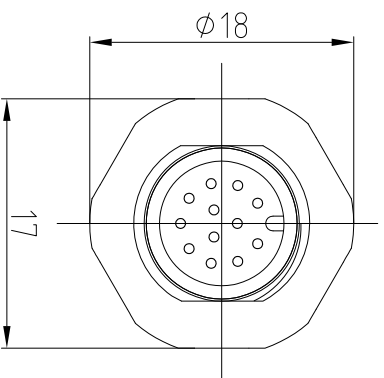



SUGGESTED PANEL CUT OUT



SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	NBR
OPERATING CURRENT	2 A
OPERATING VOLTAGE	60 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	12 x 24 AWG
OPERATING TEMPERATURE	-20°C — +85°C
PROTECTION CLASS	IEC IP67

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4% (OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

UNIT OF MEASUREMENT	
MILLIMETER	 GT SEE TECH
	Tianjin Geneuo Technology Co.,Ltd

							Description: FEZ1221-*	
						Date: 2018.4.27		
						Approved: Date:		
						Process Y J F Date: 2018.5.24		
						Checked WY Date: 2018.5.3		
						Designed L XH Date: 2018.4.27		
REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE			
						3RD Angle Projection	www.gsee-tech.cn www.gsee-tech.com	REV A
							SOURCE DRAWING-FOR REFERENCE ONLY	