



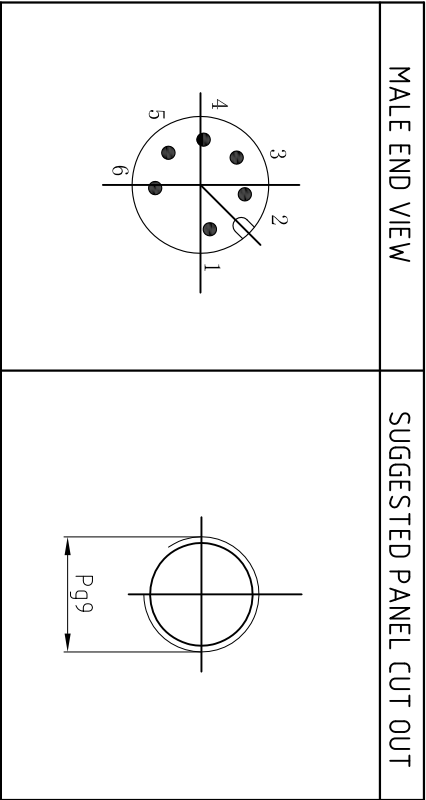

SPECIFICATIONS		
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK	
CONTACT/PLATING	BRASS/GOLD	
HOUSING MATERIAL/PLATING	BRASS/NICKEL	
O-RING MATERIAL	NBR	
OPERATING CURRENT	2 A	
OPERATING VOLTAGE	60 V	
CONDUCTOR CROSS SECTION(AWG)	24 AWG	
OPERATING TEMPERATURE	-20℃ — +105℃	
PROTECTION CLASS	IEC IP67	

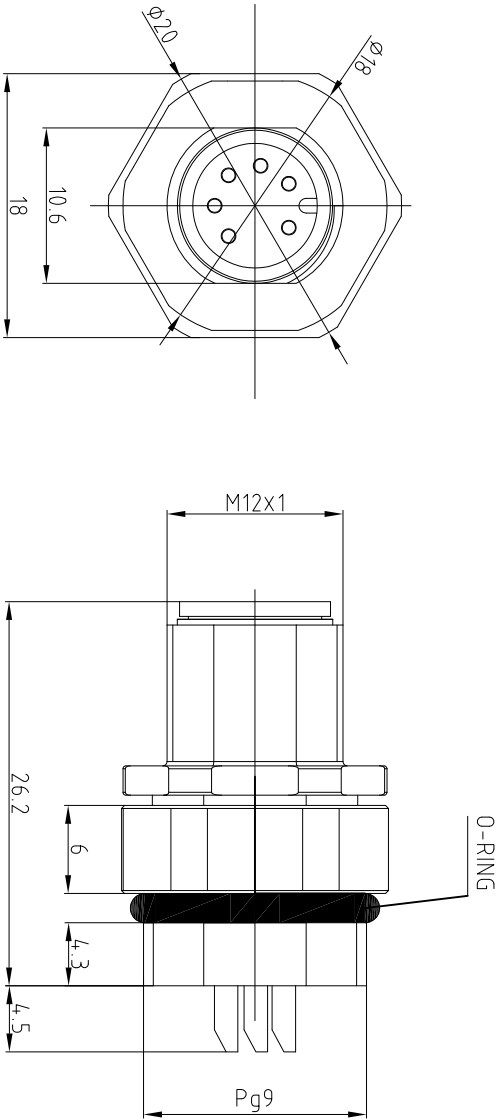

CABLE LENGTH	TOLERANCE
ALL LENGTHS	±4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER		Tianjin Geneuo Technology Co.,Ltd		GSEE TECH	
Approved: Date:	Date: 2018.4.27	Description: FEZ62-L		www.gsee-tech.cn www.gsee-tech.com	
Process:YJF Date:2018.5.24	Scale: 1:1				
Checked:WY Date:2018.5.3	3RD Angle Projection				
Designed:LXH Date:2018.4.27		SOURCE DRAWING-FOR REFERENCE ONLY		REV A	