



MALE END VIEW

SUGGESTED PANEL CUT OUT




- 1=WH
- 2=BN
- 3=GN
- 4=YE
- 5=GY
- 6=PK
- 7=BU
- 8=RD




SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	NBR
OPERATING CURRENT	2 A
OPERATING VOLTAGE	60 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	8 x 24 AWG
OPERATING TEMPERATURE	-20°C — +85°C
PROTECTION CLASS	IEC IP67

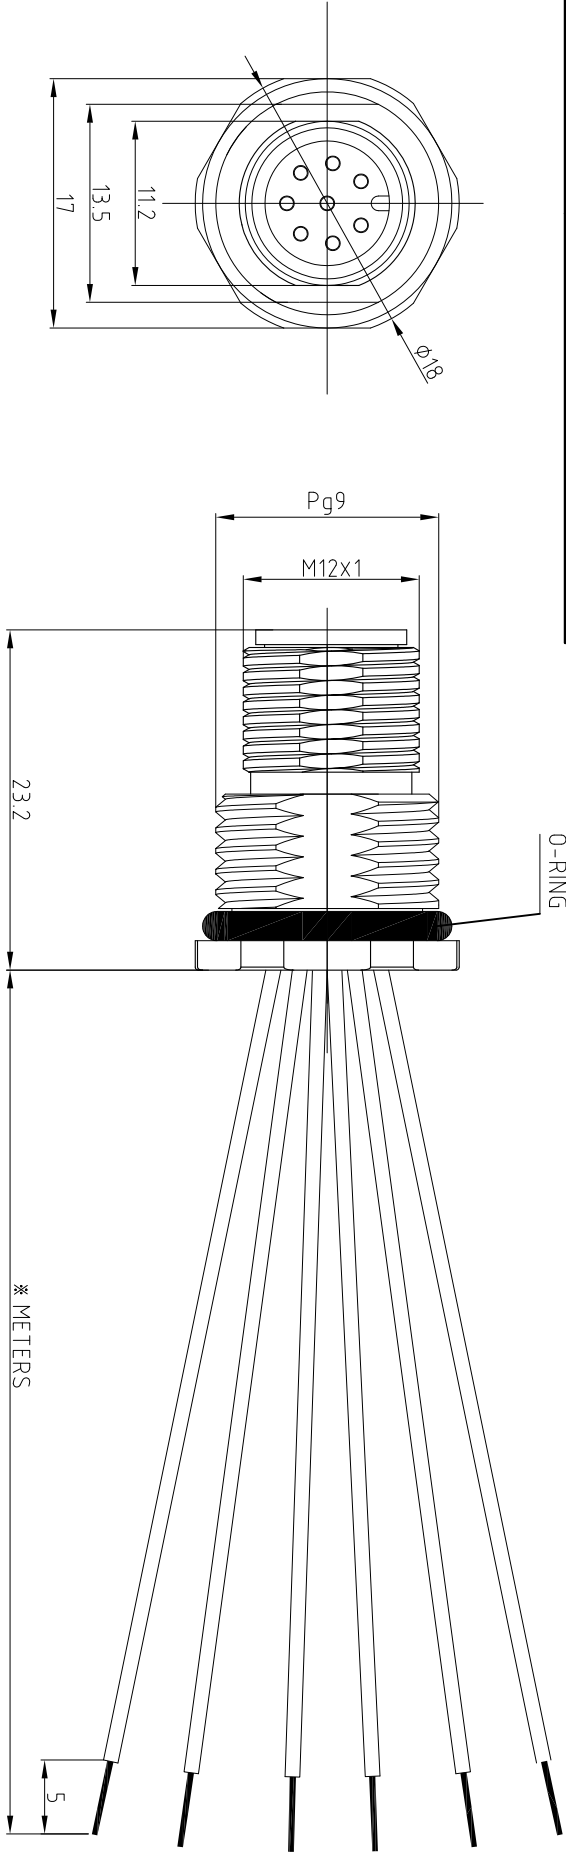

※ METERS

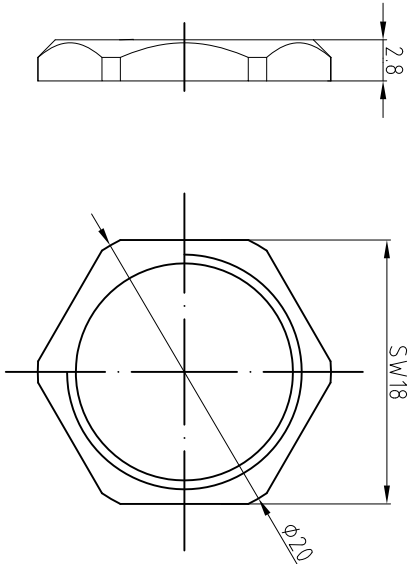

CABLE LENGTH	TOLERANCE
--------------	-----------

ALL LENGTHS
+4%(OR 50mm) OF LENGTH
-0% (OR 0mm) OF LENGTH
WHICHEVER IS GREATER

STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

UNIT OF MEASUREMENT
MILLIMETER

Tianjin Geneuo Technology Co., Ltd



Approved: Date: 2018.4.27


Process YJF Date: 2018.5.24

Checked Y Date: 2018.5.3

Designed LXH Date: 2018.4.27

Scale: 1:1

3RD Angle Projection



Description: FEZ81-※

www.gsee-tech.cn
www.gsee-tech.com

REV A

REV COUNT DESCRIPTION OF REVISIONS BY CHECKED DATE