



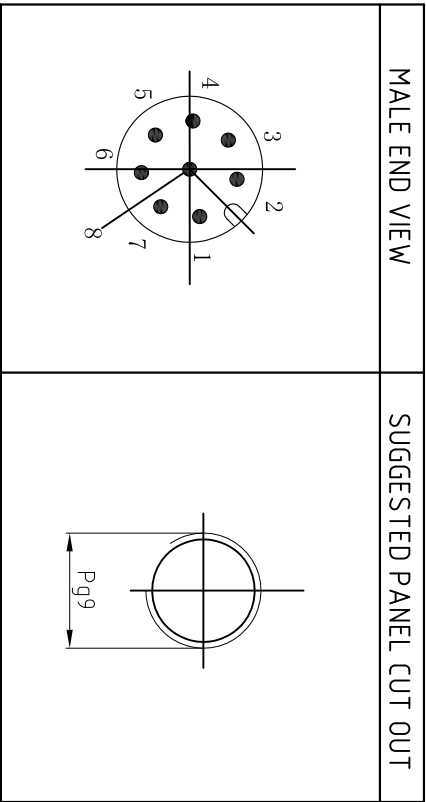

SPECIFICATIONS			
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK		
CONTACT/PLATING	BRASS/GOLD		
HOUSING MATERIAL/PLATING	BRASS/NICKEL		
O-RING MATERIAL	NBR		
OPERATING CURRENT	2 A		
OPERATING VOLTAGE	60 V		
CONDUCTOR CROSS SECTION(AWG)	24 AWG		
OPERATING TEMPERATURE	-20℃ — +105℃		
PROTECTION CLASS	IEC IP67		

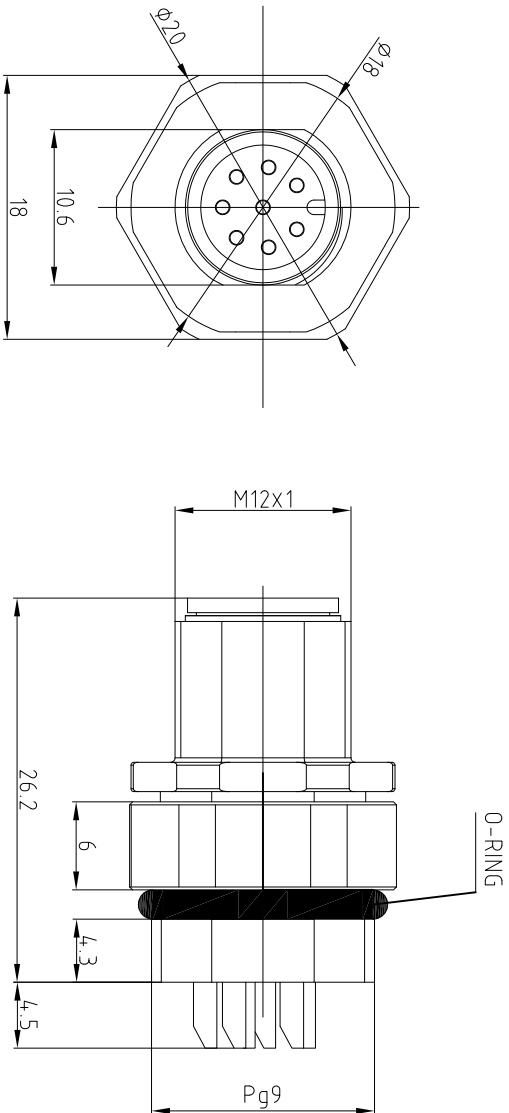

CABLE LENGTH	TOLERANCE
ALL LENGTHS	±4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER		Tianjin Geneuo Technology Co.,Ltd			GSEE TECH	
Approved: Date:	Date: 2018.4.27	Description: FEZ82-L			www.gsee-tech.cn www.gsee-tech.com	
Process:YJF Date:2018.5.24	Scale: 1:1					
Checked:Y Date:2018.5.3	3RD Angle Projection					
Designed:LXH Date:2018.4.27					SOURCE DRAWING-FOR REFERENCE ONLY	REV A