




SUGGESTED PANEL CUT OUT

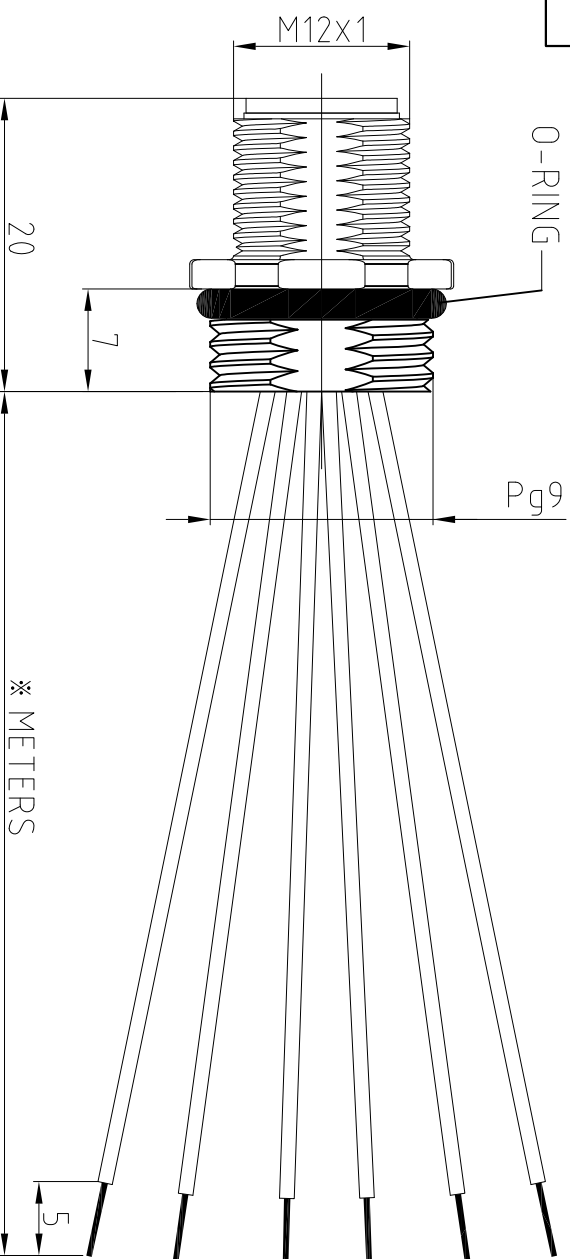

Technical drawing of a circular part. The outer diameter is labeled as 13.7. The inner hole diameter is labeled as $\varnothing 15.4$.

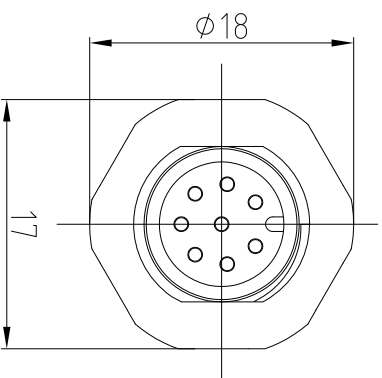

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	NBR
OPERATING CURRENT	2 A
OPERATING VOLTAGE	60 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	8 x 24 AWG
OPERATING TEMPERATURE	-20°C — +85°C
PROTECTION CLASS	IEC IP67

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4% (OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

UNIT OF MEASUREMENT
MILLIMETER

Tianjin Geneuo Technology Co.,Ltd



Approved: Date:	Date: 2018.4.27
--------------------	--------------------

Description:



FEZ821-*

Process: YJF Date: 2018.5.24	Scale: 1:1
---------------------------------	---------------

Checked: WY	Designed: LXH
Date: 2018.5.3	Date: 2018.4.27

3RD Angle Projection		
		

www.gsee-tech.cn www.gsee-tech.com	REV A
SOURCE DRAWING-FOR REFERENCE ONLY	

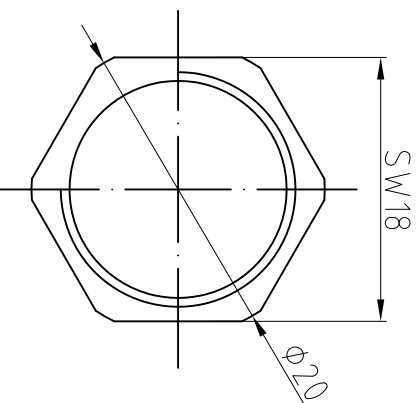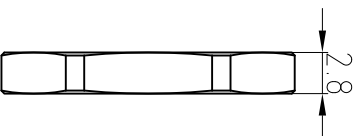

REV	COUNT