



FEMALE END VIEW

1. BU
2. RD
3. BN
4. GY
5. GN/YE
6. RD/BU
7. GN
8. GY/PK
9. WH/GN
10. WH/YE
11. WH/GY
12. BK
13. YE/BN
14. BN/GN
15. WH
16. YE
17. PK





1. BU
2. RD
3. BN
4. GY
5. GN/YE
6. RD/BU
7. GN
8. GY/PK
9. WH/GN
10. WH/YE
11. WH/GY
12. BK
13. YE/BN
14. BN/GN
15. WH
16. YE
17. PK



SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
SEALING RING MATERIAL	NBR
RATED CURRENT	9A(POWER);2A(SIGNAL)
RATED VOLTAGE	150 V
MAX.CONDUCTORS SIZE	3x18AWG+14x22AWG
OPERATING TEMPERATURE	-40°C — +85°C
PROTECTION CLASS	IEC IP67

CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
SEALING RING MATERIAL	NBR
RATED CURRENT	9A(POWER);2A(SIGNAL)
RATED VOLTAGE	150 V
MAX.CONDUCTORS SIZE	3x18AWG+14x22AWG
OPERATING TEMPERATURE	-40°C — +85°C
PROTECTION CLASS	IEC IP67

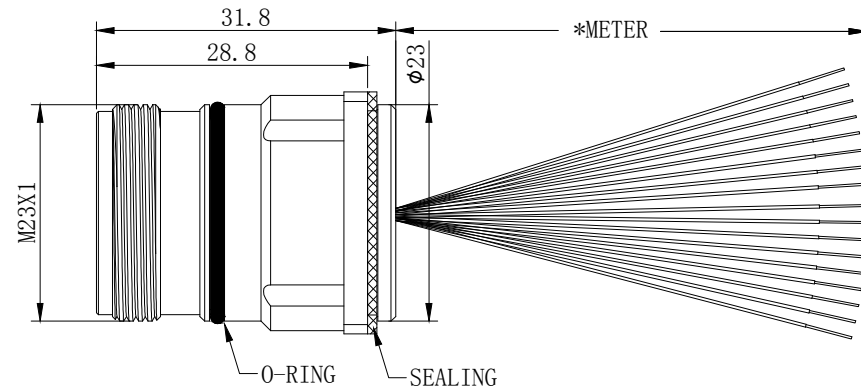

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT					
MILLIMETER		Tianjin Geneuo Technology Co.,Ltd			
Approved: Date:	Date:	2019.3.26	Description: FGWK17-17R-x/RS19.8		
Process: Date:	Scale:	2:1			
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com		REV A
Designed: ZL Date: 2019.5.28			SOURCE DRAWING-FOR REFERENCE ONLY		