
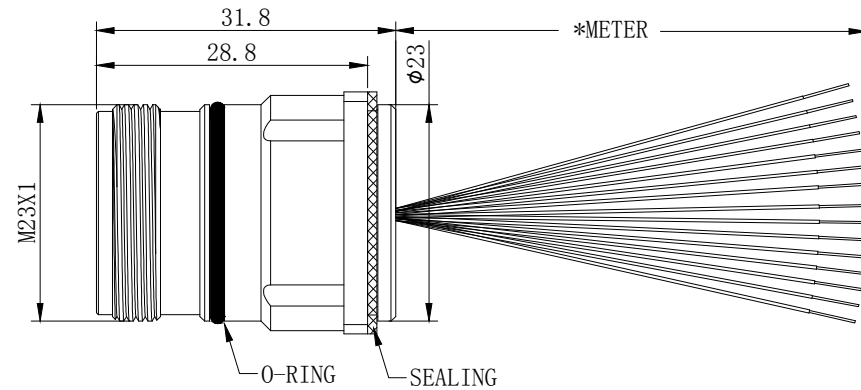


The diagram shows a circular board with 19 numbered positions arranged in a spiral pattern. A legend on the right identifies the pieces for each number:

- 1. N/C
- 2. RD
- 3. GY
- 4. RD/BU
- 5. GN
- 6. BU
- 7. GY/PK
- 8. WH/GN
- 9. WH/YE
- 10. N/C
- 11. N/C
- 12. GN/YE
- 13. YE/BN
- 14. BN/GN
- 15. WH
- 16. YE
- 17. PK
- 18. N/C
- 19. BN

1. N/C
2. RD
3. GY
4. RD/BU
5. GN
6. BU
7. GY/PK
8. WH/GN
9. WH/YE
10. N/C
11. N/C
12. GN/YE
13. YE/BN
14. BN/GN
15. WH
16. YE
17. PK
18. N/C
19. BN

CONTACTANT CARRIER MATERIAL/COLOR	PBT/WHITE
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
SEALING RING MATERIAL	NBR
RATED CURRENT	9 A(PINS 6,12,19),2A(OTHERS)
RATED VOLTAGE	150 V
MAX.CONDUCTORS SIZE	3X18AWG,12X22AWG
OPERATING TEMPERATURE	-40°C — +85°C
PROTECTION CLASS	IEC IP67



REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT					
MILLIMETER		Tianjin Geneuo Technology Co.,Ltd			
Approved: Date:		Date: 2019.3.26		Description: FGWK19-15-x/RS19.8	
Process: Date:		Scale: 2:1			
Checked: Date:		3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	
Designed: ZL Date: 2019.5.28				SOURCE DRAWING-FOR REFERENCE ONLY	
				REV A	