



FEMALE END VIEW


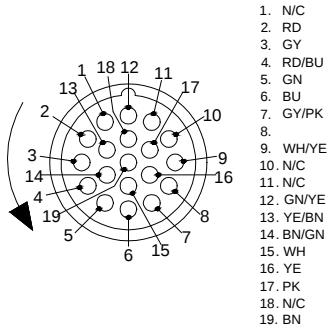


TYPICAL PANEL CUTOUT



SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
SEALING RING MATERIAL	NBR
RATED CURRENT	9 A(PINS 6,12,19),2A(OTHERS)
RATED VOLTAGE	150 V
MAX.CONDUCTORS SIZE	3X18AWG,12X22AWG
OPERATING TEMPERATURE	-40°C — +85°C
PROTECTION CLASS	IEC IP67

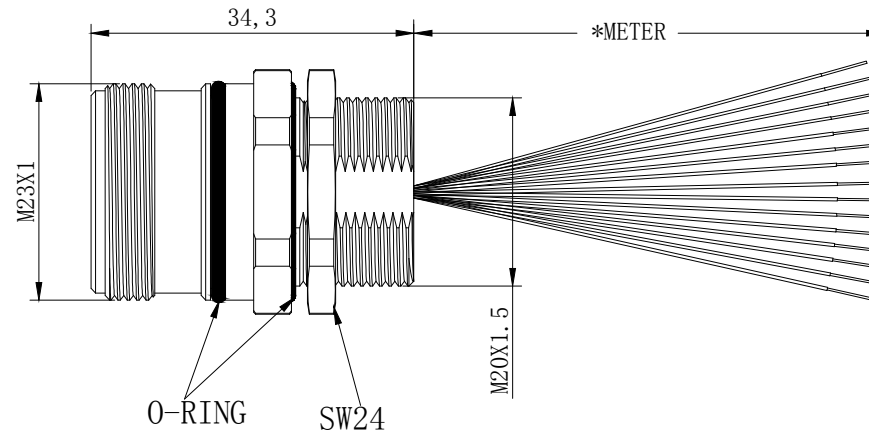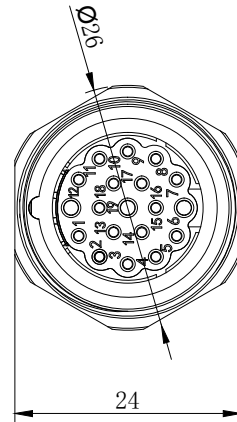

CABLE LENGTH

TOLERANCE

ALL LENGTHS

+4%(OR 50mm) OF LENGTH
-0% (OR 0mm) OF LENGTH
WHICHEVER IS GREATER

STRIP LENGTH

TOLERANCE

0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

UNIT OF MEASUREMENT

MILLIMETER

Tianjin Geneuo Technology Co.,Ltd



Approved:

Date:

Date:

2019.3.26

Description:

FGWK19-152-x/M20

Process:

Date:

Scale:


2:1

Checked:

Date:

3RD Angle

Projection



www.gsee-tech.cn
www.gsee-tech.com

REV
A

SOURCE DRAWING-FOR REFERENCE ONLY

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE