

FEMALE END VIEW



1. VT
2. RD
3. GY
4. RD/BU
5. GN
6. BU
7. GY/PK
8. WH/GN
9. WH/YE
10. WH/GY
11. BK
12. GN/YE
13. YE/BN
14. BN/GN
15. WH
16. YE
17. PK
18. GY/BN
19. BN

1. VT
2. RD
3. GY
4. RD/BU
5. GN
6. BU
7. GY/PK
8. WH/GN
9. WH/YE
10. WH/GY
11. BK
12. GN/YE
13. YE/BN
14. BN/GN
15. WH
16. YE
17. PK
18. GY/BN
19. BN

Diagram illustrating the typical panel cutout dimensions:

- Panel Diameter: 19.8
- Mounting Hole Diameter: $\phi 2.3$
- Mounting Hole Offset: 4 x $\phi 2.8$
- Mounting Hole Spacing: 19.8 (horizontal and vertical)

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
SEALING RING MATERIAL	NBR
RATED CURRENT	9 A(PINS 6,12,19),2A(OTHERS)
RATED VOLTAGE	150 V
MAX.CONDUCTORS SIZE	3X18AWG,16X22AWG
OPERATING TEMPERATURE	-40℃ — +85℃
PROTECTION CLASS	IEC IP67

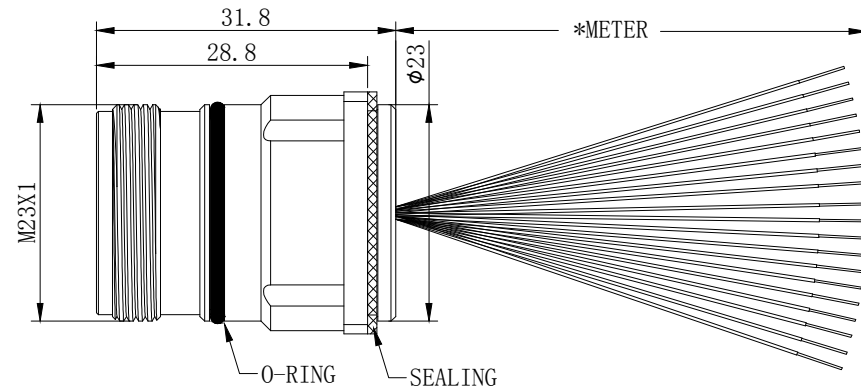

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT		 Tianjin Geneuo Technology Co.,Ltd		
MILLIMETER				
Approved: Date:	Date: 2019.3.26	Description: FGWK19-19-x/RS19.8		
Process: Date:	Scale: 2:1			
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com SOURCE DRAWING-FOR REFERENCE ONLY	REV A
Designed: ZL Date: 2019.5.28				