


SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
SEALING RING MATERIAL	NBR
RATED CURRENT	6 A
RATED VOLTAGE	300 V
MAX.CONDUCTORS SIZE	12x18AWG
OPERATING TEMPERATURE	-40°C — +85°C
PROTECTION CLASS	IEC IP67

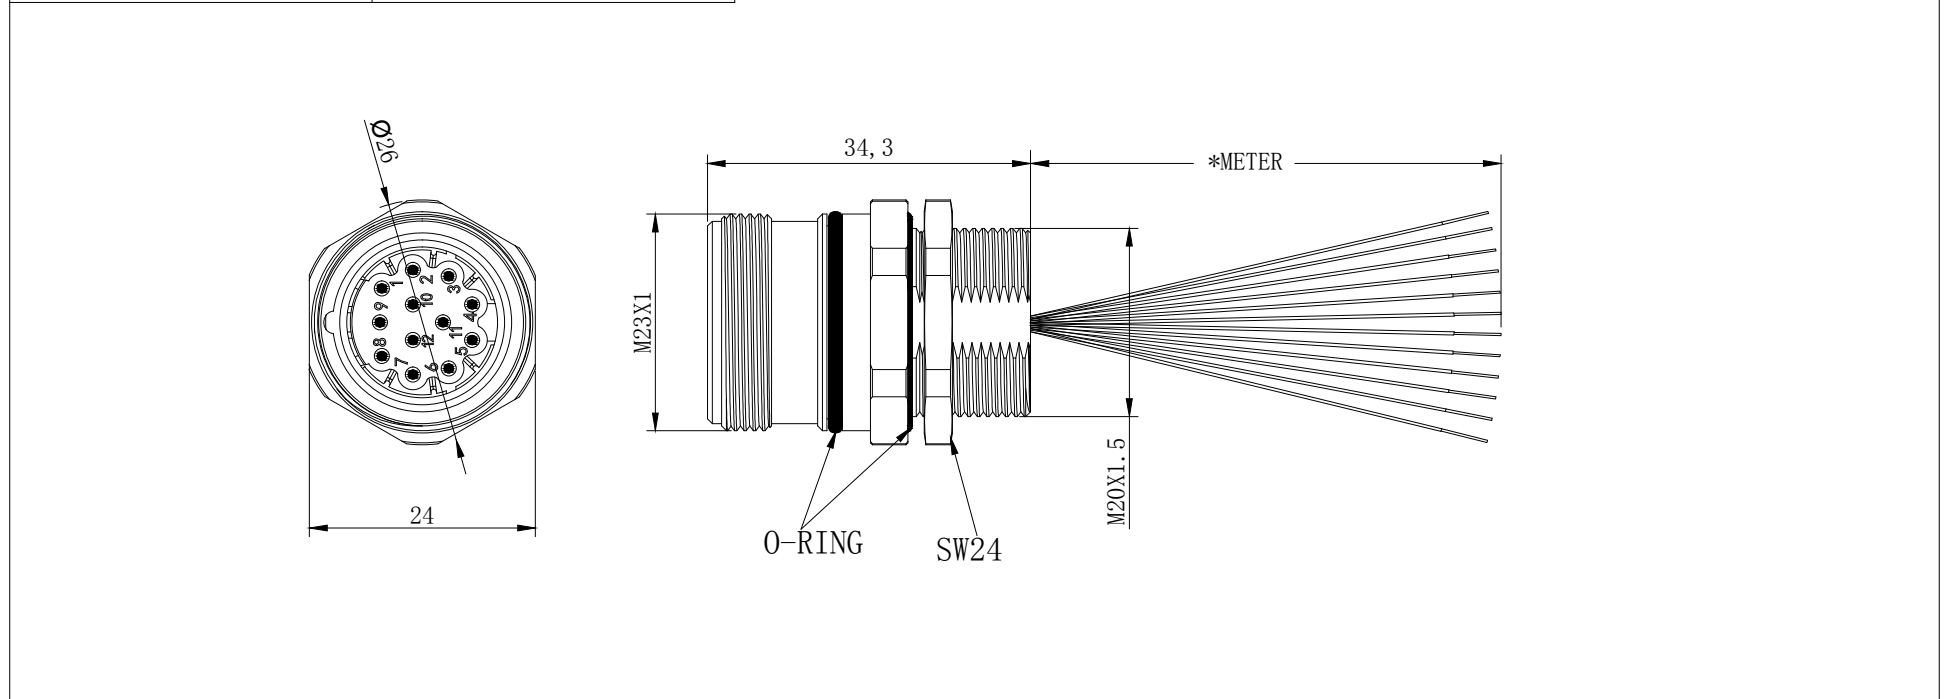

CABLE LENGTH		TOLERANCE	
ALL LENGTHS		+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	
STRIP LENGTH		TOLERANCE	
0 - 7mm		± 1.0mm	
8 - 29mm		± 1.5mm	
30 - 49mm		± 2.0mm	
50 - 69mm		± 3.0mm	
70 - 100mm		± 4.0mm	
over 100mm		± 5.0mm	

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT		MILLIMETER	
Approved:		Date:	
Date:		2019.3.26	
Process:		Scale:	
Date:		2:1	
Checked:		3RD Angle Projection	
Date:			
Designed: ZL			
Date: 2019.5.28			

Tianjin Geneuo Technology Co.,Ltd	
Description:	
FGWZ12-122-x/M20	
www.gsee-tech.cn www.gsee-tech.com	
SOURCE DRAWING-FOR REFERENCE ONLY	

REV	A
-----	---