



MALE END VIEW





- 1. BN
- 2. BU
- 3. WH
- 4. GN/YE
- 5. OG
- 6. YE
- 7. GY
- 8. PK
- 9. RD
- 10. BN/WH
- 11. BU/WH
- 12. GN/WH

TYPICAL PANEL CUTOUT




SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
SEALING RING MATERIAL	NBR
RATED CURRENT	6 A
RATED VOLTAGE	300 V
MAX.CONDUCTORS SIZE	12x18AWG
OPERATING TEMPERATURE	-40°C — +85°C
PROTECTION CLASS	IEC IP67

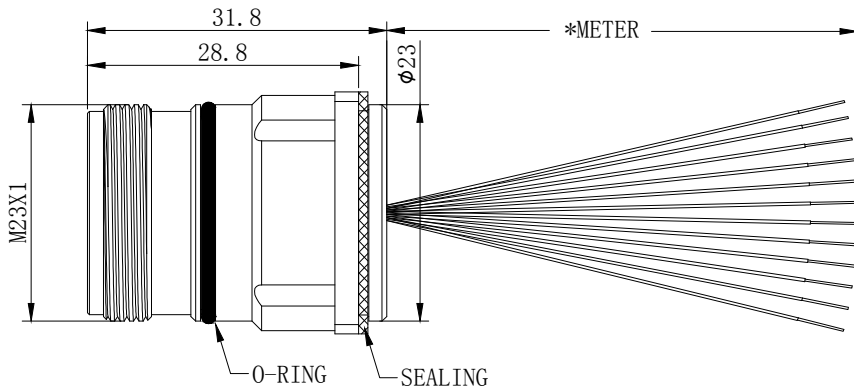

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER		 Tianjin Geneuo Technology Co.,Ltd		
Approved: Date:	Date: 2019.3.26	Description: FGWZ12-12R-x/RS19.8		
Process: Date:	Scale: 2:1			
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	REV A
Designed: ZL Date: 2019.5.28				
SOURCE DRAWING-FOR REFERENCE ONLY				