



MALE END VIEW





1. BU
2. RD
3. BN
4. GY
5. GN/YE
6. RD/BU
7. GN
8. GY/PK
9. WH/GN
10. WH/YE
11. WH/GY
12. BK
13. YE/BN
14. BN/GN
15. WH
16. YE
17. PK

TYPICAL PANEL CUTOUT



SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
SEALING RING MATERIAL	NBR
RATED CURRENT	9A(POWER);2A(SIGNAL)
RATED VOLTAGE	150 V
MAX.CONDUCTORS SIZE	3x18AWG+14x22AWG
OPERATING TEMPERATURE	-40°C — +85°C
PROTECTION CLASS	IEC IP67

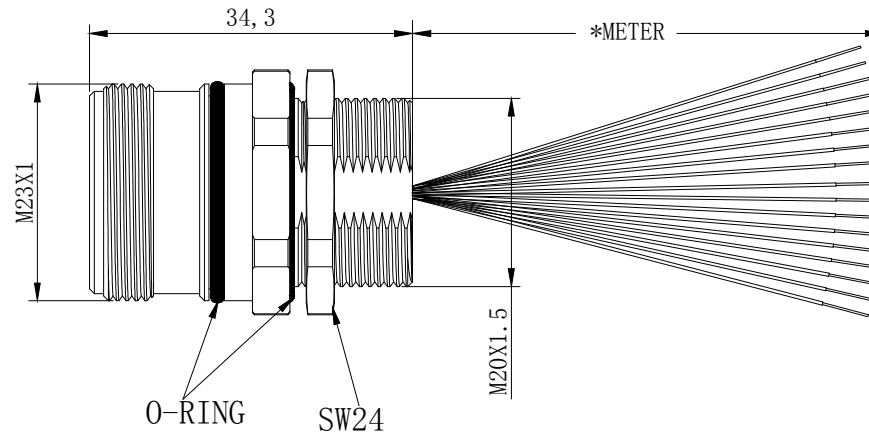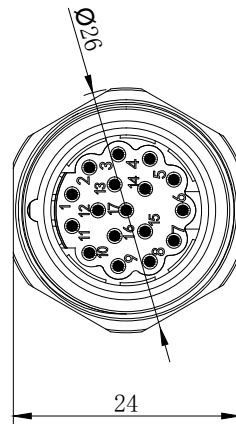

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT
MILLIMETER

Approved:
Date:

Process:
Date:

Checked:
Date:


Designed: ZL
Date: 2019.5.28

Tianjin Geneuo Technology Co.,Ltd

Date: 2019.3.26

Scale: 2:1

3RD Angle
Projection



Description:
FGWZ17-172-x/M20

www.gsee-tech.cn
www.gsee-tech.com

SOURCE DRAWING-FOR REFERENCE ONLY

REV
A

**GT GSEE
TECH**