



MALE END VIEW





TYPICAL PANEL CUTOUT



SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
SEALING RING MATERIAL	NBR
RATED CURRENT	9 A(PINS 6,12,19),2A(OTHERS)
RATED VOLTAGE	150 V
MAX.CONDUCTORS SIZE	3X18AWG,8X22AWG
OPERATING TEMPERATURE	-40°C — +85°C
PROTECTION CLASS	IEC IP67

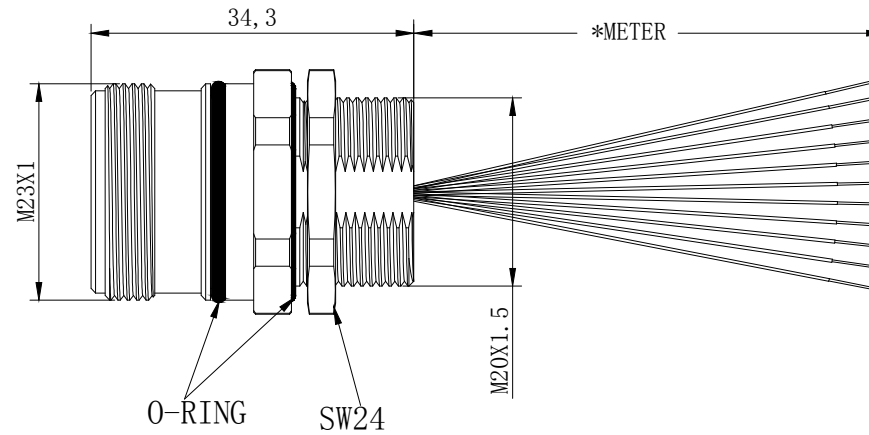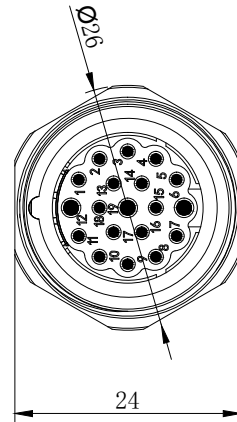

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT		Tianjin Geneuo Technology Co.,Ltd		
MILLIMETER				
Approved: Date:	Date: 2019.3.26	Description: FGWZ19-112-x/M20		
Process: Date:	Scale: 2:1			
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	REV A
Designed: ZL Date: 2019.5.28				
			SOURCE DRAWING-FOR REFERENCE ONLY	