
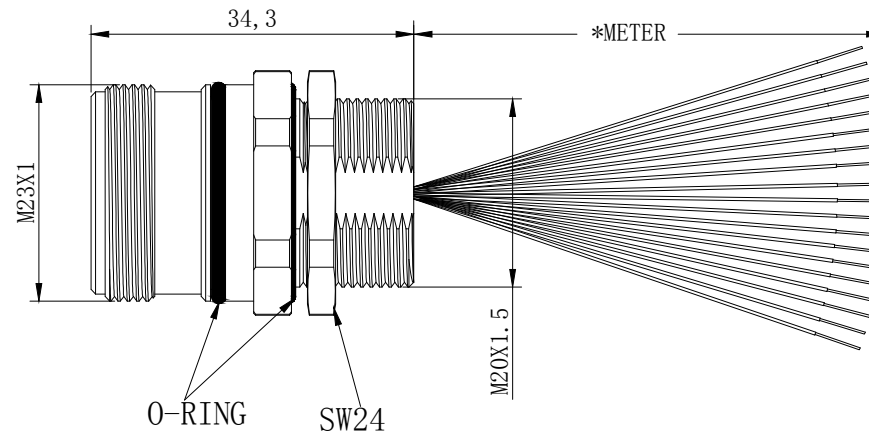


1. VT
2. RD
3. GN
4. RD/BU
5. GN
6. BU
7. GN/PK
8. WH/GN
9. WH/YE
10. WH/GY
11. BK
12. GN/YE
13. YE/BN
14. BN/GN
15. WH
16. YE
17. PK
18. GY/BN
19. BN

Technical drawing of a circular part. The diameter is labeled as $\varnothing 20,2$ and the height is labeled as 18,7.

CONTACTANT CARRIER MATERIAL/COLOR	PBT/WHITE
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
SEALING RING MATERIAL	NBR
RATED CURRENT	9 A(PINS 6,12,19),2A(OTHERS)
RATED VOLTAGE	150 V
MAX.CONDUCTORS SIZE	3X18AWG,16X22AWG
OPERATING TEMPERATURE	-40°C — +85°C
PROTECTION CLASS	IEC IP67

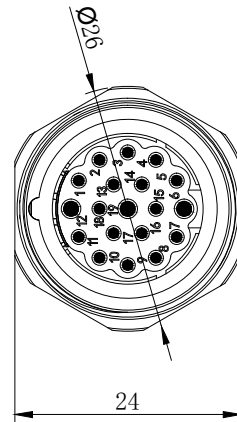

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4% (OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT					
MILLIMETER		Tianjin Geneuo Technology Co.,Ltd			
Approved: Date:	Date: 2019.3.26		Description: FGWZ19-192-x/M20		
Process: Date:	Scale: 2:1				
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com		REV A
Designed: ZL Date: 2019.5.28			SOURCE DRAWING-FOR REFERENCE ONLY		