





SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PA6/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	ZINC/NICKEL
SEALING MATERIAL	NBR
OPERATING CURRENT	28A
OPERATING VOLTAGE	630 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	6 x 12AWG
OPERATING TEMPERATURE	-25°C — +85°C
PROTECTION CLASS	IEC IP67

MALE END VIEW	SUGGESTED PANEL CUT OUT
 1= 2= PE= 4= 5= 6=	

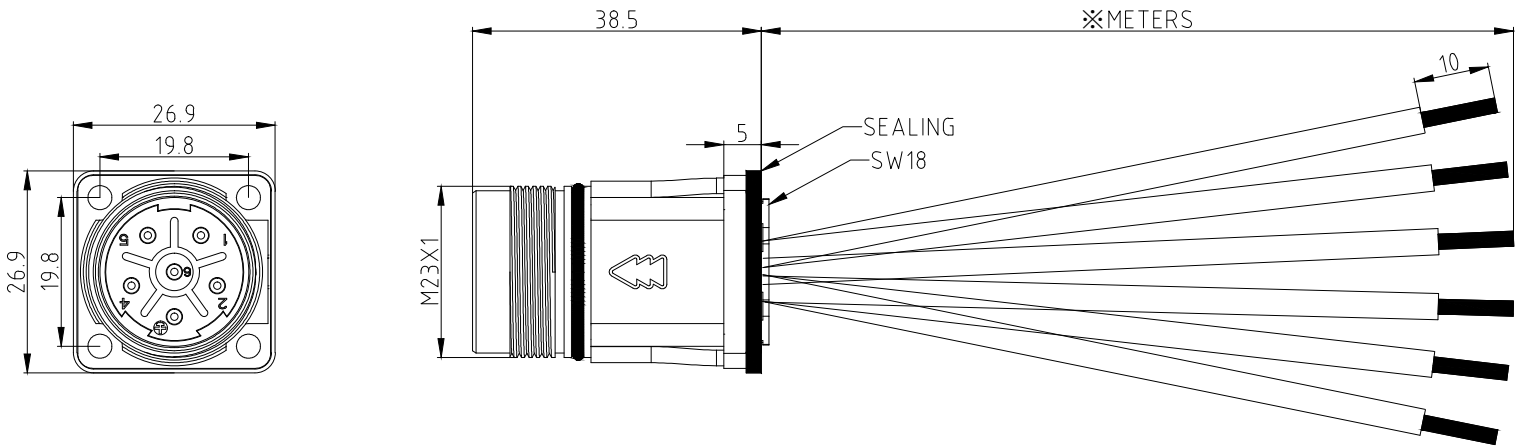

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0%(OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT		GT GSEE TECH Tianjin Geneuo Technology Co.,Ltd		
MILLIMETER				
Approved: Date:	Date: 2019.3.13	Description: FGWZ6228-C/RS19.8		
Process: Date:	Scale: 1:1			
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	REV A
Designed: ZL Date: 2019.3.13				
SOURCE DRAWING-FOR REFERENCE ONLY				