


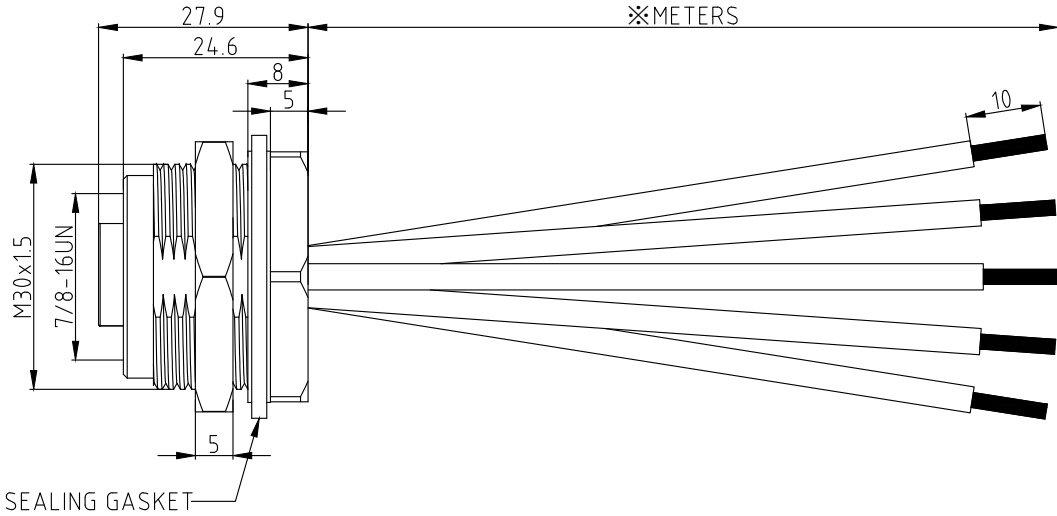
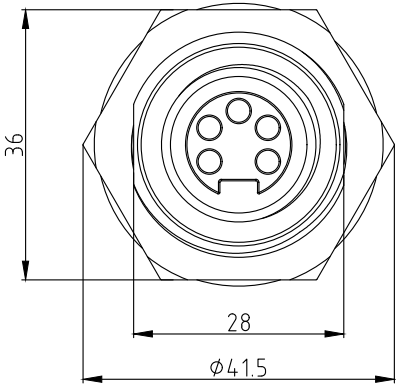


FEMALE END VIEW	SUGGESTED PANEL CUT OUT	SPECIFICATIONS	
 1=BK 2=BU 3=GN/YE 4=BN 5=WH		CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		HOUSING MATERIAL/PLATING	BRASS/NICKEL
		O-RING MATERIAL	NBR
		OPERATING CURRENT	9A
		OPERATING VOLTAGE	600 V
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS (AWG)	5 x 16 AWG
		OPERATING TEMPERATURE	-25°C — +85°C
		PROTECTION CLASS	IEC IP67



CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT		GT GSEE TECH		
MILLIMETER		Tianjin Geneuo Technology Co.,Ltd		
Approved: Date:	Date: 2019.2.2	Description: FMK51-※/M30		
Process: Date:	Scale: 1:1			
Checked: Date:	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	REV A
Designed: WY Date: 2019.2.2			SOURCE DRAWING-FOR REFERENCE ONLY	