

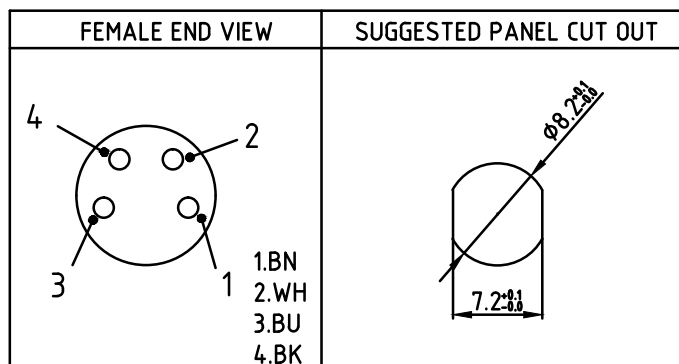


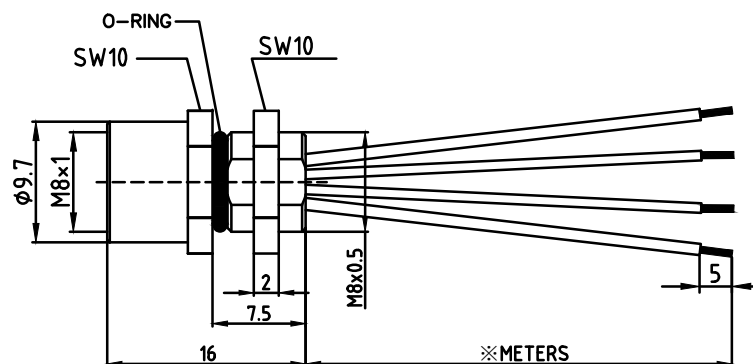


SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	NBR
OPERATING CURRENT	3 A
OPERATING VOLTAGE	60 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	4 x 24 AWG
OPERATING TEMPERATURE	-20°C — +105°C
PROTECTION CLASS	IEC IP67



CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	$\pm 1.0\text{mm}$
8 - 29mm	$\pm 1.5\text{mm}$
30 - 49mm	$\pm 2.0\text{mm}$
50 - 69mm	$\pm 3.0\text{mm}$
70 - 100mm	$\pm 4.0\text{mm}$
over 100mm	$\pm 5.0\text{mm}$

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT MILLIMETER		Tianjin Geneuo Technology Co.,Ltd			
Approved Date: Date: 2018.08.07		Description: FSK42-※/M8			
Process: YJF Date: 2018.08.19					
Scale: 1:1					
Checked: WY Date: 2018.10.9					
Designed: LHT Date: 2018.08.07					
SOURCE DRAWING-FOR REFERENCE ONLY					