

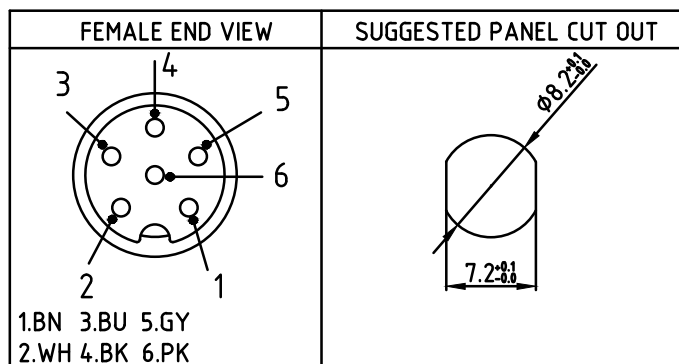


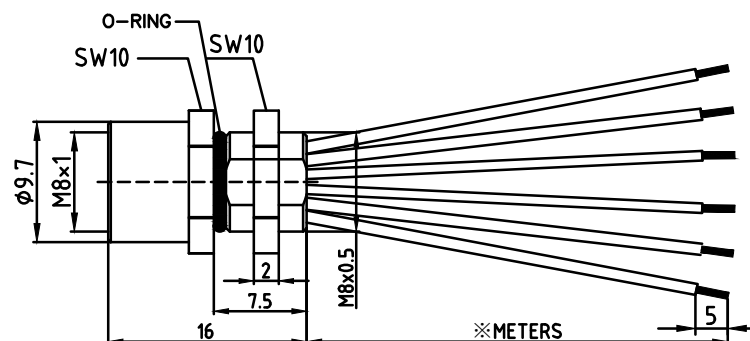


SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	NBR
OPERATING CURRENT	1.5 A
OPERATING VOLTAGE	30 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	6 x 26 AWG
OPERATING TEMPERATURE	-20°C — +105°C
PROTECTION CLASS	IEC IP67



CABLE LENGTH	TOLERANCE
ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0 - 7mm	± 1.0mm
8 - 29mm	± 1.5mm
30 - 49mm	± 2.0mm
50 - 69mm	± 3.0mm
70 - 100mm	± 4.0mm
over 100mm	± 5.0mm

REV	COUNT	DESCRIPTION OF REVISIONS	BY	CHECKED	DATE

UNIT OF MEASUREMENT		Tianjin Geneuo Technology Co.,Ltd		
MILLIMETER				
Approved Date:	Date: 2018.08.07	Description: FSK62-※/M8		
Process: YJF Date: 2018.08.19	Scale: 1:1			
Checked: WY Date: 2018.10.9	3RD Angle Projection		www.gsee-tech.cn www.gsee-tech.com	REV A
Designed: LHT Date: 2018.08.07				
SOURCE DRAWING-FOR REFERENCE ONLY				